



## LINEA Arco 2

Product number: 5011266

Configuration: stainless steel finish, low pressure

### Configuration options


- 5011252 | chrome, high pressure
- 5011253 | stainless steel finish, high pressure
- 5011262 | black matt, high pressure
- 5011263 | graphite, high pressure
- 5011265 | chrome, low pressure
- 5011266 | stainless steel finish, low pressure
- 5011267 | black matt, low pressure
- 5011268 | graphite, low pressure
- 5011271 | copper coloured, high pressure

- ✓ Sink faucet
- ✓ low pressure
- ✓ with swivelling/pull-out metal outlet

Single lever faucet. With **swivelling/pull-out** metal outlet, side lever, laminar aerator and ceramic cartridge.

- swivel range 360°
- drill Ø 35 mm
- corresponds to the German and European drinking water regulation/directive

**BELGAQUA**

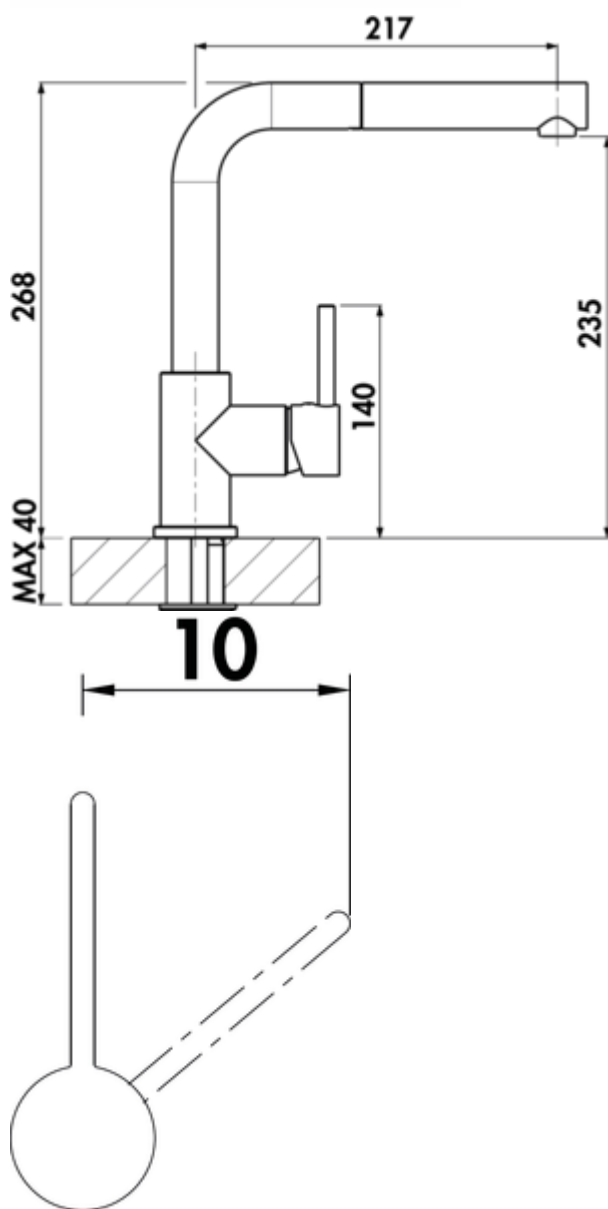

[more infos...](#)

## Technical data

|                                      |                                       |                                          |                     |
|--------------------------------------|---------------------------------------|------------------------------------------|---------------------|
| Article type                         | Sink faucet                           | Swivel range outlet                      | 360°                |
| Brand                                | LINEA                                 | Type of fitting                          | Single lever faucet |
| Number of handles                    | 1                                     | Operating pressure                       | low pressure        |
| Total installation height            | 268 mm                                | Material                                 | brass               |
| Height                               | 268 mm                                | Worktop thickness                        | 40 mm               |
| Outreach                             | 217 mm                                | Number of tap holes                      | 1                   |
| Outlet                               | with swivelling/pull-out metal outlet | Cartridge size                           | 35 mm               |
| Discharge height                     | 235 mm                                | Minimum distance wall to centre tap hole | 10 mm               |
| Operating mode                       | Lever                                 | Connection type                          | G 3/8" F            |
| Drilling diameter                    | 35 mm                                 | Connection size                          | DN 15               |
| Handle position                      | side lever                            | Connection hoses                         | 450 mm              |
| Cartridge with ceramic sealing discs | Yes                                   |                                          |                     |

