

## PRIME flow P-Klima-E 150 wall conduct

Product number: 4051078

Configuration: white, stainless steel


### Configuration options

4051078 | white, stainless steel

- ✓ Wall sleeve
- ✓ plug-in system

Wall conduct, with backflow trap — N-Klick system for secure connection with the universal connector

- direct connection of the flat adapter, round pipe or round pipe bends
- max. wall thickness 550 mm, can be shortened to 220 mm
- core hole drilling in nominal  $\varnothing$  162 or 164 mm
- wall sleeve for tool-free installation and sealing against leakage

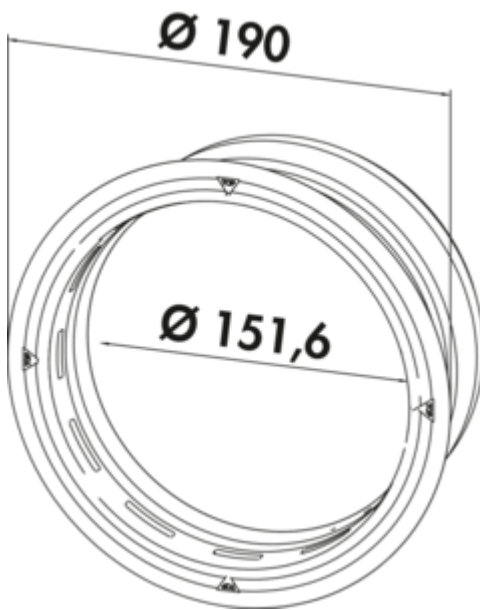

[more infos...](#)

### Technical data

Article type	Wall sleeve	Outer diameter	190 mm
Brand	PRIME flow	Inner diameter	151,6 mm
Material	stainless steel/plastic	Connection diameter	150 mm
Mounting/Fixing	plug-in system	Suitable wall thickness	max. wall thickness 550 mm
Diameter	core hole drilling in nominal $\varnothing$ 162 or 164 mm	Blind version	with backpressure shutter
Shortenability	can be shortened to 220 mm	System dimension	150
Field of use & application	Outside	Output drive	round
Shape	round	Ventilation system	COMPAIR PRIME flow <sup>®</sup>

Dimensional sketch (PDF)

