



VersaLid USB A/C

Product number: 7053305

Configuration: with Belgian/French sockets, lid white matt

Configuration options

7053273 | lid aluminium anodised

7053274 | lid white matt

7053275 | lid black matt

7053304 | with Belgian/French sockets, lid aluminium anodised

7053305 | with Belgian/French sockets, lid white matt

7053306 | with Belgian/French sockets, lid black matt

- ✓ Built-in socket element
- ✓ 2 x with Belgian/French socket
- ✓ angular

Socket element, 2-fold and USB A/C charger (charging station). For installation in worktop, front panel or side wall.

— cut-out dimensions approx. 193 x 59 mm

— installation depth approx. 51 mm


— for panel thickness from 15mm

— 1 X USB charger type A, 5.2 VDC, IA/I out: 1 x 1500 mA

— 1 X USB charger type C, 5.2 VDC, IA/I out: 1 x 1500 mA

— 2000 mm mains connection line, earthing contact plug enclosed loose

— cable outlet can be horizontal and vertical at the bottom

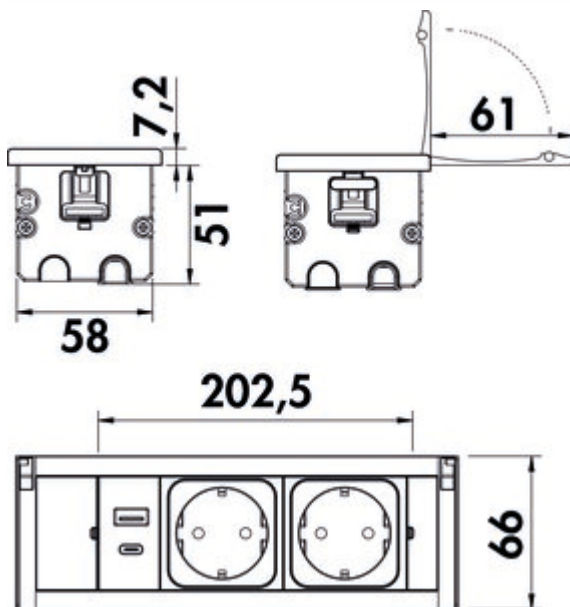

[more infos...](#)

Technical data

Article type	Socket element	Installation depth	approx. 51 mm
Width	202,5 mm	Version sockets	2 x with Belgian/French socket
Cable outlet	cable outlet bottom horizontal and vertical	Mains plug loosely enclosed	Yes
Mounting/Fixing	in the worktop front panel side wall Claw attachment	Colour bezel	white matt
Note	can be retrofitted from above	Number of USB ports	2
Material fascia	aluminium	USB type	USB-A USB-C
Certification	CE	Type of socket element	Built-in socket element
Cut-out dimension	approx. 193 x 59 mm	Number of sockets (total)	2
Shape	angular	Worktop thickness	from 15 mm
Length of the supply line (primary)	2.000 mm	USB version	1 x USB charger type A, 5,2 VDC, IA/I output: 1500 mA 1 x USB charger type C, 5,2 VDC, IA/I output: 1500 mA