



KWC Luna E7

Product number: 5022242

Configuration: chrome, high pressure

Configuration options

5022242 | chrome, high pressure


5022248 | black matt, high pressure

- ✓ Sink faucet
- ✓ high pressure
- ✓ Swivelling

Single lever faucet. With swivelling/pull-out hose with shower head (can be switched to stream or shower), side lever and ceramic cartridge.

— swivel range 360°

— drill Ø 35 mm

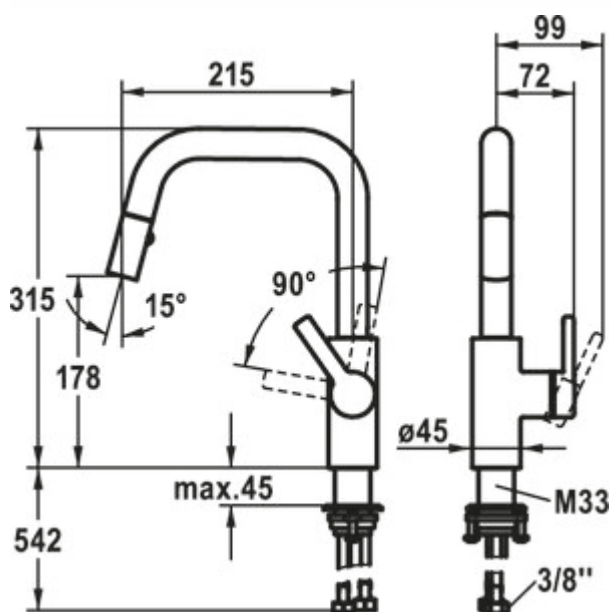


[more infos...](#)

Technical data

Article type	Sink faucet	Type of fitting	Single lever faucet
Brand	KWC	Operating pressure	high pressure
Number of handles	1	Width	45 mm
Total installation height	315 mm	Hose thread	3/8"
Outreach	215 mm	Worktop thickness	45 mm
Outlet	Swivelling Extractable	Swivel range handle	90 °
Discharge height	178 mm	TouchProtect	Yes
Operating mode	Lever	Number of tap holes	1
Drilling diameter	35 mm	Convertible jet/shower	Yes
Handle position	right	Spring-guided hose shower	No
Manufacturer's warranty	5 years manufacturer's warranty 10-year after-sales guarantee on spare parts	Length shower hose	400 mm
Cartridge with ceramic sealing discs	Yes	Minimum distance wall to centre tap hole	0 mm
Swivel range outlet	360°	Angle of inclination of aerator	15 °
Factory customer service	Yes	Type of hose shower	Integrated hose spray

Dimensional sketch (PDF)

KWC LUNA E

KWC


KWC-Nr.	Oberfläche
10.441.004.000FL	ganzchrom
A 215, flexible Anschlusschläuche	

Küche
Hebelmischer

- Positionierung des Hebels nur rechts möglich
 - Sicherheit für Kinder: Kaltwasser bei Hebelposition vorne
- Abstand Wand zu Mitte Tischbohrung min. 25 mm
- TouchProtect - Schutz vor Verbrennungen durch Zweischalenprinzip
- Ausziehbare Umstellbrause
 - Neoperl® Cascade®
 - PowerClean - Siebstrahlmodus, mit Rückstellautomatik
 - bis 400 mm ausziehbar
 - schwarzer Gewebeschlauch
 - QuickConnect - Einfaches Schlauchstecksystem
- SwivelStop - Schlauchdurchführung, schwenkbar 360°, begrenzt auf 150°
- KWC Steuerpatrone M 35 S
 - mit Keramikscheibentechnik
 - Auslaufmenge und Temperatur stufenlos einstellbar
- Flexible Anschlusschläuche ½"
- QuickInstallation - Befestigung mit Gewindestutzen M33 x 1.5 mit Feststellschrauben
- Tischbohrung ø35 mm

Sortiments, Modell- und technische Änderungen vorbehalten. Massangaben in mm.

www.kwc.com 14.04.2020