



PRIME flow P-UVB 150 universal connector



Product number: 4051004
Configuration: light grey

Configuration options
4051004 | light grey

- ✓ Connecting element
- ✓ can be installed horizontally and vertically
- flexible connector for flat duct pipes and flat duct pipe bends
- manufactured in one piece from soft and hard components
- 2-lip seal for **airtight** installation, fulfils at least tightness class ATC3 according to DIN EN 16798 in system construction
- outer grip points for better handling and decoupling of structure-borne sound
- compensator for flexible installation, horizontal/ vertical 0°–15°
- length 85 mm

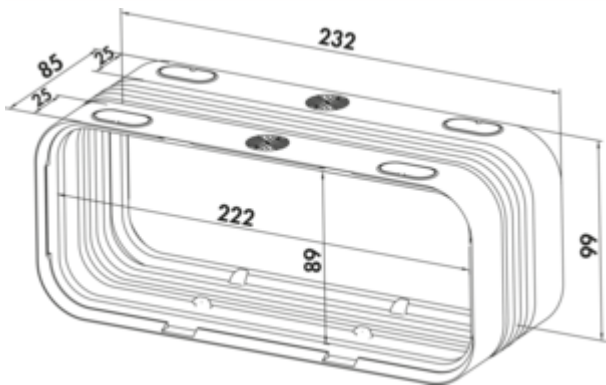

[more infos...](#)

Technical data

Article type	Connecting element	Further	outer grip points for better handling and decoupling of structure-borne sound
Brand	PRIME flow	Suitable for	for flat duct pipes and flat duct pipe bends
Width	85 mm	System dimension	150
Properties	flexible (horizontal/ vertical 0°–15°)	Output drive	angular
Mounting/Fixing	can be installed horizontally and vertically	Ventilation system	COMPAIR PRIME flow®
Note	manufactured in one piece from soft and hard components 2-lip seal for airtight installation, fulfils at least tightness class ATC3 according to DIN EN 16798 in system construction		

Technical drawing of the P-UVB 150 Universalbinder, showing front, side, and cross-sectional views with dimensions.

Front View Dimensions:

- Overall width: 232
- Inner width: 224
- Overall height: 91
- Inner height: 99

Side View Dimensions:

- Overall depth: 85
- Inner depth: 25

Cross-section A-A:

The cross-section A-A shows the internal structure of the binder, including the binding material and the internal reinforcement.