



Reban 6

Product number: 5025162

Configuration: stainless steel coloured, high pressure

Configuration options

5025162 | stainless steel coloured, high pressure

5025163 | black matt, high pressure

- ✓ Sink faucet
- ✓ high pressure
- ✓ with swivelling outlet

Single lever faucet. With **swivelling/pull-out** shower hose (can be switched to stream or shower), side lever, laminar flow aerator and ceramic cartridge.


— charming transition from a square to a rounded design language

— shower hose: simple click attachment

— swivel range 360°

— drill-Ø 35 mm

— corresponds to the German and European drinking water regulation/directive

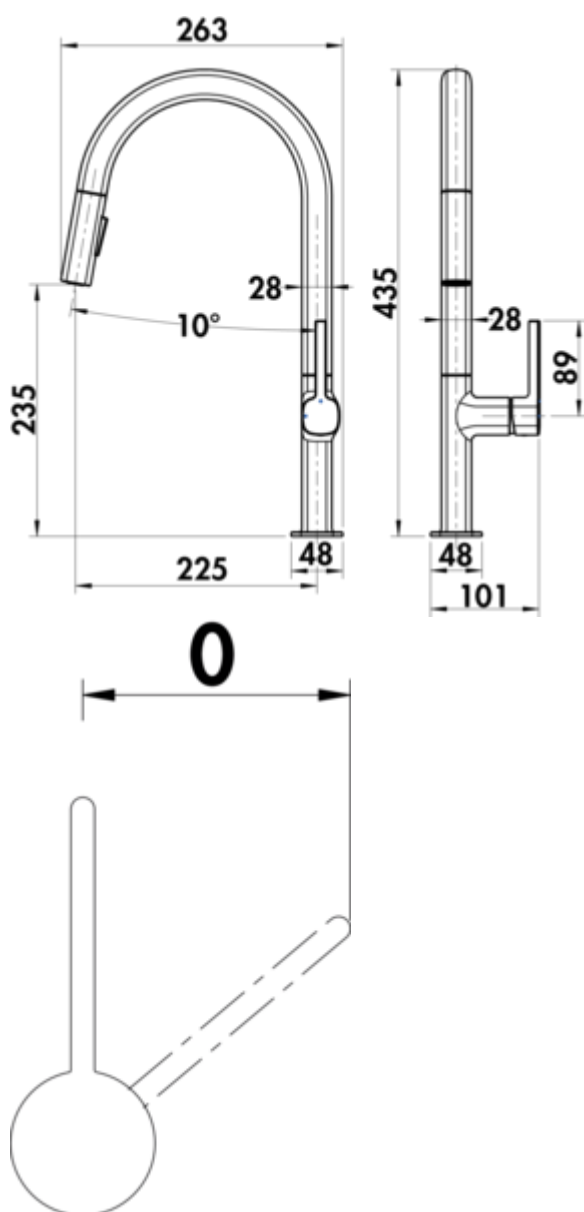

[more infos...](#)

Technical data

Article type	Sink faucet	Mounting/Fixing	showerhead hose: simple click attachment
Number of handles	1	Surface/coating	powder coated
Total installation height	435 mm	Swivel range handle	0 °
Height	435 mm	Number of tap holes	1
Outreach	225 mm	Hoses preassembled	Yes
Outlet	with swivelling outlet	Cartridge size	25 mm
Discharge height	235 mm	ECO function	energy-saving cold start function
Operating mode	Lever	Convertible jet/shower	Yes
Drilling diameter	35 mm	Minimum distance wall to centre tap hole	0 mm
Handle position	side lever	Type of hose shower	with swivelling/pull-out hose with shower head (can be switched to stream or shower)
Lever length	89 mm	Max. Flow rate at 3 bar	12,5 l/min
Cartridge with ceramic sealing discs	Yes	Flow rate at 3 bar (cold)	9,5 l/min
Swivel range outlet	360°	Flow rate at 3 bar (hot)	9,5 l/min
Beam type	Laminar beam	Flow rate at 3 bar (mix)	12,5 l/min
Type of fitting	Single lever faucet	Size laminar flow regulator	M18,5x1
Operating pressure	high pressure	Connection hoses	700 mm
Width	48 mm	Shower hose version	simple click fastening