


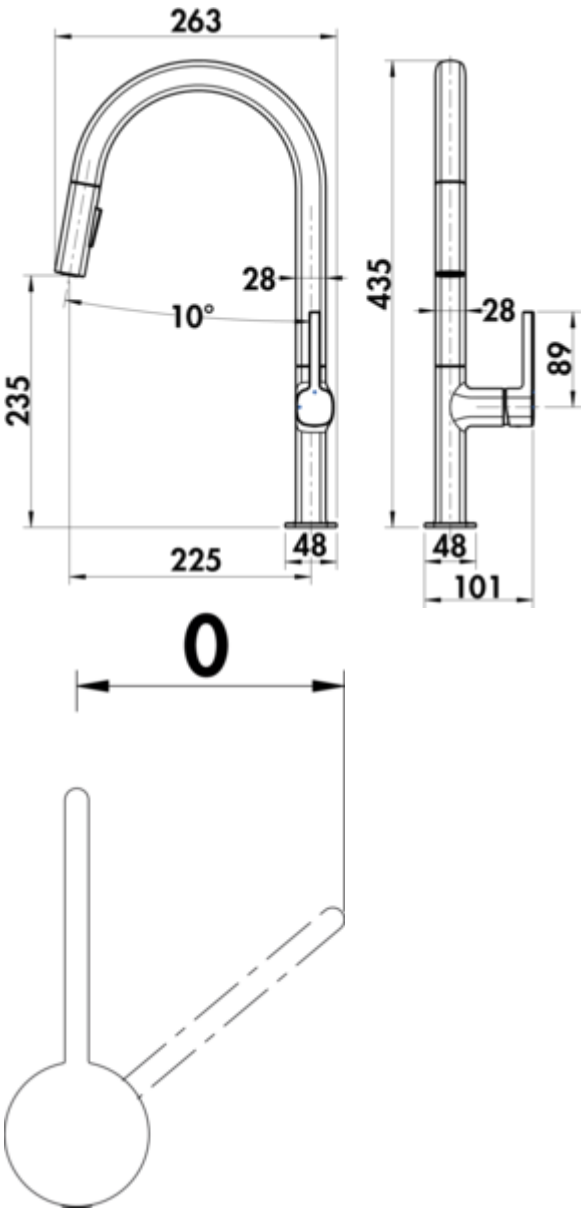

Reban 6

Product number: 5025162
Configuration: stainless steel coloured, high pressure

Configuration options
5025162 | stainless steel coloured, high pressure
5025163 | black matt, high pressure

✓ Sink faucet
✓ high pressure
✓ energy-saving cold start function

Single lever faucet. With **swivelling/pull-out** shower hose (can be switched to stream or shower), side lever, laminar flow aerator and ceramic cartridge.
— charming transition from a square to a rounded design language
— shower hose: simple click attachment
— swivel range 360°
— drill-Ø 35 mm
— corresponds to the German and European drinking water regulation/directive

KERAMISCHE DICHTUNG

more infos...

Naber GmbH
Enschedestr. 24
DE-48529 Nordhorn

Tel. +49 5921 704-0
Fax +49 5921 704-140
naber@naber.com

Technical data

Article type	Sink faucet
Number of handles	1
Total installation height	435 mm
Height	435 mm
Outreach	225 mm
Discharge height	235 mm
Operating mode	Lever
Drilling diameter	35 mm
Handle position	side lever
Lever length	89 mm
Cartridge with ceramic sealing discs	Yes
Swivel range outlet	360°
Beam type	Laminar beam
Type of fitting	Single lever faucet
Operating pressure	high pressure
Width	48 mm
Mounting/Fixing	showerhead hose: simple click attachment
Note	corresponds to the German and European drinking water regulation/ directive

Further	charming transition from a square to a rounded design language
Surface/coating	powder coated
Swivel range handle	0 °
Number of tap holes	1
Hoses preassembled	Yes
Cartridge size	25 mm
ECO function	energy-saving cold start function
Convertible jet/shower	Yes
Minimum distance wall to centre tap hole	0 mm
Type of hose shower	with swivelling/pull-out hose with shower head (can be switched to stream or shower)
Max. Flow rate at 3 bar	12,5 l/min
Flow rate at 3 bar (cold)	9,5 l/min
Flow rate at 3 bar (hot)	9,5 l/min
Flow rate at 3 bar (mix)	12,5 l/min
Size laminar flow regulator	M18,5x1
Connection hoses	700 mm
Shower hose version	simple click fastening

Naber GmbH
Enschedestr. 24
DE-48529 Nordhorn

Tel. +49 5921 704-0
Fax +49 5921 704-140
naber@naber.com

Dimensional sketch (PDF)

