


Brillante colour change LED

Product number: 7064347

Configuration: L 1167 mm, 17.6 W

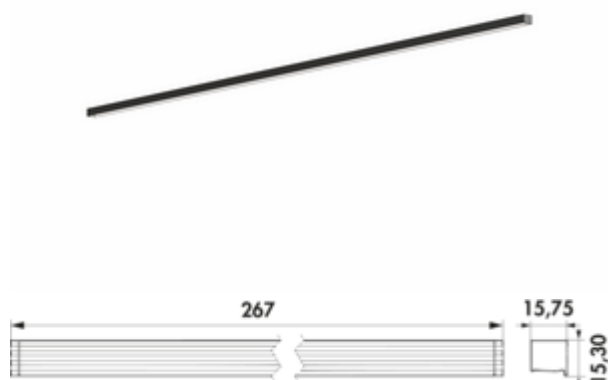

Configuration options

7064340 | L 267 mm, 3.8 W
 7064341 | L 367 mm, 5.3 W
 7064342 | L 467 mm, 6.9 W
 7064343 | L 567 mm, 8.4 W
 7064344 | L 767 mm, 11.5 W
 7064345 | L 867 mm, 12.9 W
 7064346 | L 967 mm, 14.5 W
 7064347 | L 1167 mm, 17.6 W
 7064349 | L 417 mm, 6.2 W

✓ Under-cabinet/niche light

✓ linear light

✓ 2200 K warm white to 6500 K cold white

Underfloor light. Powder-coated aluminium profile, with matt black plastic cover incl.

LED strip. **Single light without switch**

— 12 VDC

— infinitely variable adjustment of light colour from **2200 K** warm white to **6500 K** cool white

— very high quality of light thanks to colour rendering index > 90

— optimum illumination of the work area thanks to innovative lens optics technology and asymmetrical light

— max. 129 lumen/watt at **6000 K** cool white

— 2000 mm supply cable

— LIC/MEC LED system compatible

This product contains a light source of energy efficiency class E.

More information about the LIC/MEC LED system



[more infos...](#)

Technical data

Article type	Luminaire	Length of the supply line (primary)	300 mm
Height	15,30 mm	Colour temperature	2200 K warm white to 6500 K cold white
Width	1.167 mm	Colour temperature adjustable	stepless
Material	aluminium	LIC system compatible	Yes
Energy efficiency class	E	Illuminant type	LED
Mains voltage	for 12 VDC	Light yield	max. 129 lumen/watt at 6000 K cold white
Certification	CE	Material cover	plastic
Switch	No	Design	Under-cabinet/niche light linear light
Surface/coating	powder coated	Illuminant power	17.6 watts
Shape	straight		