
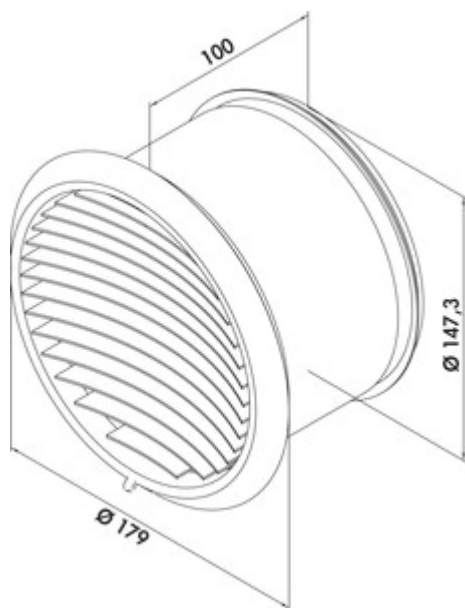




PRIME flow P-Turbo 150 external blind

Product number: 4043070

Configuration: Ø 150 mm, stainless steel

Configuration options

4043070 | Ø 150 mm, stainless steel

- ✓ External blind
- ✓ installation in the wall

Without backpressure shutter for connection to round pipe.

— connector depth 100 mm incl. foam and lip seal

— only when used with the THERMOBOX



[more infos...](#)

Technical data

Article type	External blind	Support depth	100 mm
Brand	PRIME flow	Connection diameter	150 mm
Width	179 mm	System dimension	150
Material	stainless steel	Output drive	round
Mounting/Fixing	installation in the wall	Ventilation system	COMPAIR PRIME flow®

Technical drawing of the Naboar P-Turbo 150 Außenlause. The drawing includes three views: a top view showing a circular grille with a diameter of 147.3 mm and a mounting flange diameter of 141.4 mm; a side view showing a height of 100 mm and a total width of 115 mm; and a perspective view of the grille. The grille is made of stainless steel (1.4301) and is non-flammable. The drawing also includes a table with technical specifications and a barcode.

Kundenzeichnung		Naboar 150 Turbo Naboar 150 Turbo Naboar 150 Turbo	
1		1	
100		100	
115		115	
147.3		147.3	
141.4		141.4	
1.4301		1.4301	
Naboar		Naboar	
P-Turbo 150 Außenlause		P-Turbo 150 Außenlause	
4043070		4043070	