



KWC Ono 2

Product number: 5022324

Configuration: stainless steel, high pressure

Configuration options

5022324 | stainless steel, high pressure

5022328 | chrome, high pressure

✓ Sink faucet


✓ high pressure

✓ Swivelling

Single lever faucet. With swivelling/pull-out hose with shower head (can be switched to stream or shower) and ceramic cartridge.

— swivel range 105°

— drill Ø 35 mm

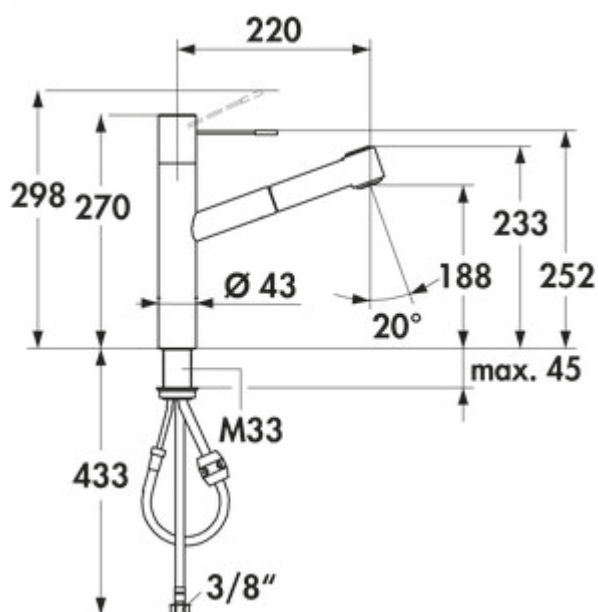

[more infos...](#)

Technical data


Article type	Sink faucet	Operating pressure	high pressure
Brand	KWC	Width	43 mm
Number of handles	1	Material	stainless steel
Total installation height	270 mm	Hose thread	3/8"
Outreach	220 mm	Worktop thickness	45 mm
Outlet	Swivelling Extractable	TouchProtect	Yes
Discharge height	188 mm	Number of tap holes	1
Operating mode	Lever	Convertible jet/shower	Yes
Drilling diameter	35 mm	Spring-guided hose shower	No
Handle position	top	Length shower hose	700 mm
Manufacturer's warranty	5 years manufacturer's warranty 10-year after-sales guarantee on spare parts	Anti-limestone jet regulator	Yes
Cartridge with ceramic sealing discs	Yes	Angle of inclination of aerator	20 °
Swivel range outlet	105°	Temperature adjustable	Yes
Factory customer service	Yes	Type of hose shower	Integrated hose spray
Type of fitting	Single lever faucet		

Accessories

5031005	Dirt Filter Ecco 1, 3/8", chrome
---------	----------------------------------

Dimensional sketch (PDF)

KWC ONO



KWC-Nr.	Oberfläche
10.151.033.000FL	ganzchrom
A 220, flexible Anschlussschläuche	
10.151.033.700FL	edelstahl
A 220, flexible Anschlussschläuche	

Küche



Hebelmischer

- Bedienungshebel aus Medizinalstahl
- TouchProtect - Schutz vor Verbrennungen durch Zweischalenprinzip
- Auszugbrause
 - SprayClean - aktive Kalkbeseitigung und schnelle Siebreinigung
 - bis 700 mm ausziehbar
 - PowerClean - Siebstrahlmodus, mit Rückstellautomatik
 - Schlauchoberfläche passend zu Armaturoberfläche
- Schlauchdurchführung, schwenkbar 105°
- EasyLock - einfache Auszugbrausenrückführung
- KWC Steuerpatrone M 35 H
 - mit Keramikscheibentechnik
 - Auslaufmenge und Temperatur stufenlos einstellbar
- Flexible Anschlussschläuche 3/8"
- Befestigung mit Gewindestutzen M33 x 1.5
- Tischbohrung ø35 mm

Auslaufmenge Normalstrahl 12 l/min (3 bar)

Auslaufmenge Siebstrahl 13 l/min (3 bar)

Armaturenengräsgruppe II

Sortiments, Modell- und technische Änderungen vorbehalten. Massangaben in mm.

www.kwc.com 04.01.2021