


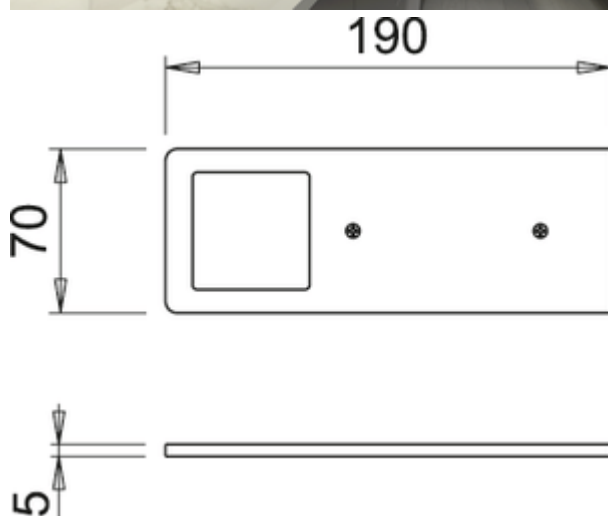

## AstraLED SE white

Product number: 7063354

Configuration: single lamp w. LED Touch s. d., 3900 K neutral white

### Configuration options

- 7063338 | individual lamp without switch, 3000 K warm white
- 7063339 | single lamp w. LED Touch s. d., 3000 K warm white
- 7063340 | set-2, 3000 K warm white
- 7063341 | set-3, 3000 K warm white
- 7063342 | set-5, 3000 K warm white
- 7063353 | individual lamp without switch, 3900 K neutral white
- 7063354 | single lamp w. LED Touch s. d., 3900 K neutral white
- 7063355 | set-2, 3900 K neutral white
- 7063356 | set-3, 3900 K neutral white
- 7063357 | set-5, 3900 K neutral white

✓ Under-cabinet/niche light

✓ 3900 K neutral white

✓ 5 watts

Lamp for mounting from below. Aluminium housing, 5 mm, illumination without visible LED points with integrated touch switch.

### Individual lamp without or with LED Touch switch and dimmer (w. LED Touch s. d.)

- 5 watt, 24 V, two colour ranges: **3000 K** warm white, **3900 K** neutral white
- 65 lumen/watt
- brightness continuously dimmable using LED touch switch and dimmer
- 200 mm supply line, 2000 mm connecting line with mini-plug-in system
- additional memory function: the last setting is saved

### Set 2, 3, 5 with LED Touch switch and dimmer consisting of:

- 1, 2 or 4 individual lamps with switch (7063338/7063353)
- 1 individual lamp with LED Touch switch and dimmer (7063339/7063354)
- 1 LED converter 2430 (7062250)
- may be extended to 6 lamps

This product contains a light source with the energy efficiency class F.



[more infos...](#)

## Technical data

|                                           |                                              |                                                       |                                          |
|-------------------------------------------|----------------------------------------------|-------------------------------------------------------|------------------------------------------|
| Article type                              | Luminaire                                    | Illuminant included                                   | Yes                                      |
| Height                                    | 5 mm                                         | Dimmer                                                | Yes                                      |
| Width                                     | 190 mm                                       | Housing colour                                        | white                                    |
| Energy efficiency class                   | F                                            | Colour temperature                                    | 3900 K neutral white                     |
| Transformer / converter required          | Yes, must be ordered separately              | Type of dimming                                       | brightness continuously dimmable         |
| Protection class                          | III                                          | Plug-in system                                        | with mini plug-in system                 |
| Mounting/Fixing                           | Base unit installation (wall unit/<br>shelf) | Illuminant type                                       | LED                                      |
| Material housing                          | aluminium                                    | Replaceable illuminant                                | No                                       |
| Length of connection cable<br>(secondary) | 2.000 mm                                     | Light yield                                           | 65 lumen/watt                            |
| Certification                             | CE                                           | Homogeneous light field without<br>visible LED points | Yes                                      |
| Switch                                    | Yes                                          | Touch function                                        | Yes                                      |
| Shape                                     | angular                                      | Design                                                | Under-cabinet/niche light                |
| Memory function                           | Yes                                          | Dimming function (composite)                          | Yes, brightness continuously<br>dimmable |
| Length of the supply line (primary)       | 150 mm                                       | Illuminant power                                      | 5 watts                                  |