


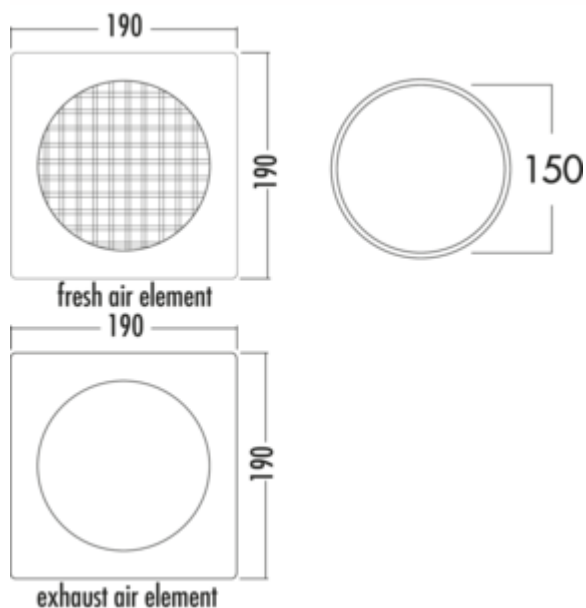

## E-Klima A/Z 150

Product number: 4044053

Configuration: waste and fresh air wall conduct

### Configuration options

4044053 | waste and fresh air wall conduct

4044055 | fresh air element

4044056 | waste air element

- ✓ Wall sleeve
- ✓ installation in the wall

Two-piece wall conduct with separate exhaust and fresh air elements. The two **stainless steel** design external blinds in modern lamella look with internal back pressure shutters solve even spatially difficult installation situations. An internal **stainless steel** cover on the waste air element can be pushed over the plastic pipe and completely covers the wall penetration. On the supply side there is a grid outlet with a connector on the round pipe. Both elements can be used next to each other as a set, or as single elements. Optimum flow values are achieved through volume-flow controlled waste and fresh air openings.

**The fresh air flap only opens with negative pressure.**

When installed with an open-flue chimney, please coordinate this with the chimney sweep responsible.

- stainless steel external blind 190 x 190 mm per blind
- round waste air connection Ø 150 mm
- installation depth 490–690 mm
- wall penetration Ø ca. 155 mm per element



[more infos...](#)

### Technical data

|                 |                                                                                                     |                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|-----------------|-----------------------------------------------------------------------------------------------------|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Article type    | Wall sleeve                                                                                         | Diameter wall opening | 155 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Height          | 190 mm                                                                                              | Connection diameter   | 150 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Width           | 190 mm                                                                                              | Installation depth    | 490–690 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Material        | stainless steel                                                                                     | Wall box version      | two-piece wall conduct with separate exhaust and fresh air elements. The two stainless steel design external blinds in modern lamella look with internal back pressure shutters solve even spatially difficult installation situations. An internal stainless steel cover on the waste air element can be pushed over the plastic pipe and completely covers the wall penetration. On the supply side there is a grid outlet with a connector on the round pipe. Both elements can be used next to each other as a set, or as single elements |
| Mounting/Fixing | installation in the wall                                                                            | System dimension      | 150                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Note            | When installed with an open-flue chimney, please coordinate this with the chimney sweep responsible | Output drive          | round                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Certification   | stainless                                                                                           | Ventilation system    | COMPAIR flow 150                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Shape           | angular                                                                                             |                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |

Dimensional sketch (PDF)

