


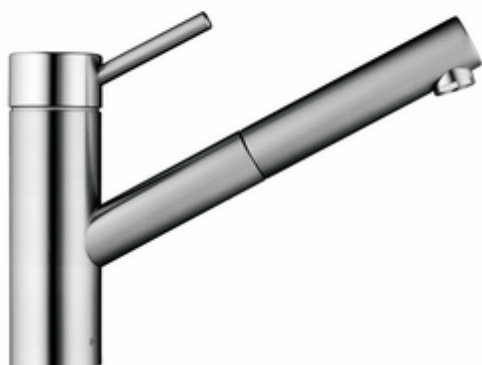

KWC Inox 3

Product number: 5022329

Configuration: stainless steel, high pressure

Configuration options

5022329 | stainless steel, high pressure

- ✓ Sink faucet
- ✓ high pressure
- ✓ Swivelling


Single lever faucet with swivelling/pull-out outlet (from metal) and ceramic cartridge.

— swivel range 130°

—drill Ø 35 mm



BELGAQUA

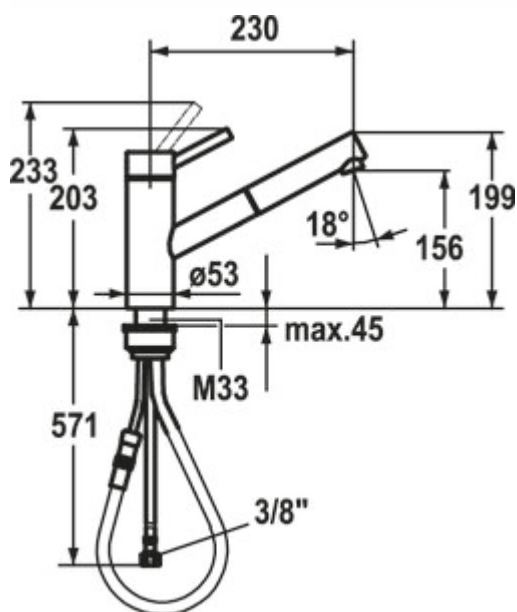

[more infos...](#)


Technical data

Article type	Sink faucet	Type of fitting	Single lever faucet
Brand	KWC	Operating pressure	high pressure
Number of handles	1	Width	53 mm
Total installation height	203 mm	Material	stainless steel
Outreach	230 mm	Hose thread	3/8"
Outlet	Swivelling Extractable	Worktop thickness	45 mm
Discharge height	156 mm	TouchProtect	Yes
Operating mode	Lever	Number of tap holes	1
Drilling diameter	35 mm	Temperature limiter/scald protection	Yes
Handle position	top	Spring-guided hose shower	No
Manufacturer's warranty	5 years manufacturer's warranty 10-year after-sales guarantee on spare parts	Length shower hose	700 mm
Cartridge with ceramic sealing discs	Yes	Angle of inclination of aerator	18 °
Swivel range outlet	130°	Temperature adjustable	Yes
Factory customer service	Yes		

Dimensional sketch (PDF)

KWC INOX

KWC



KWC-Nr.	Oberfläche
10.271.103.700FL	edelstahl
A 230, flexible Anschlusschläuche	

Küche

Hebelmischer

- TouchProtect - Schutz vor Verbrennungen durch Zweischalenprinzip
- Auszugauslauf
 - Neoperl® Cascade®
 - bis 700 mm ausziehbar
 - Schlauchoberfläche passend zu Armatoeroberfläche
- Schlauchdurchführung, schwenkbar 130°
- EasyLock - einfache Auszugbrausenrückführung
- KWC Steuerpatrone L 39 - Universal
 - mit Keramikscheibentechnik
 - Auslaufmenge und Temperatur stufenlos einstellbar
 - Temperatur- und Mengenbegrenzung
- Flexible Anschlusschläuche 3/8"
- Befestigung mit Gewindestutzen M33 x 1.5
- Tischbohrung ø35 mm

Auslaufmenge 12 l/min (3 bar)
Armaturengeräuschgruppe I

Sortiments-, Modell- und technische Änderungen vorbehalten. Massangaben in mm.

www.kwc.com 20.11.2020