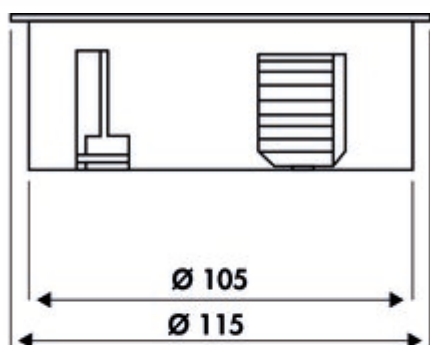


## Twist USB A

Product number: 7053174

Configuration: with Belgian/French socket, black matt

### Configuration options

- 7053170 | with earthed plug socket, stainless steel col.
- 7053171 | with earthed plug socket, black matt
- 7053172 | with earthed plug socket, white matt
- 7053173 | with Belgian/French socket, stainless steel coloured
- 7053174 | with Belgian/French socket, black matt
- 7053175 | with Belgian/French socket, white matt

- ✓ Socket element
- ✓ 1 x with Belgian/French socket
- ✓ round

Socket element. 1-fold and double USB charger (charging station).

- 3680 watt/16 A, 250 VAC, IP20
- 2 x USB charger type A, 5 VDC, I<sub>A</sub>/I<sub>out</sub>: 2 x 1550 mA
- H05VV-F 3G1
- 3-pole with earthing contact
- 2000 mm mains connection line, with earthed plug enclosed loose
- drill Ø 105 mm, for plate thickness from 8 mm
- increased contact protection
- cable outlet rear side



[more infos...](#)

## Technical data

|                                     |                                |                                        |                                                          |
|-------------------------------------|--------------------------------|----------------------------------------|----------------------------------------------------------|
| Article type                        | Socket element                 | Colour socket                          | black                                                    |
| Drilling diameter                   | 105 mm                         | Installation diameter                  | 115 mm                                                   |
| Mains voltage                       | 250 VAC                        | Cover/blind type                       | Turning lid                                              |
| Protection class                    | IP20                           | Integrated water drain                 | Yes                                                      |
| Cable outlet                        | cable outlet rear side         | Number of USB ports                    | 1                                                        |
| Max. connected load                 | 3680 watt                      | USB type                               | USB-A                                                    |
| Mounting/Fixing                     | installation in the worktop    | Type of socket element                 | Socket element                                           |
| Further                             | 3-pole with earthing contact   | Rated current                          | 16 A                                                     |
| Certification                       | CE                             | Wiring                                 | 3-wire with free ends bared                              |
| Shape                               | round                          | Number of sockets (total)              | 1                                                        |
| Length of the supply line (primary) | 2.000 mm                       | Opening mechanism                      | Push-to-open                                             |
| Installation depth                  | 40 mm                          | Touch protection ("child safety lock") | with increased contact protection                        |
| Version sockets                     | 1 x with Belgian/French socket | Worktop thickness                      | 8 mm                                                     |
| Mains plug loosely enclosed         | Yes                            | USB version                            | 2 x USB charger type A, 5 VDC, IA/<br>I out: 2 x 1550 mA |
| Colour bezel                        | black matt                     |                                        |                                                          |

## Accessories

|         |                                          |
|---------|------------------------------------------|
| 7053024 | Hole saw, Ø 105 mm, for Twist and Duplex |
|---------|------------------------------------------|