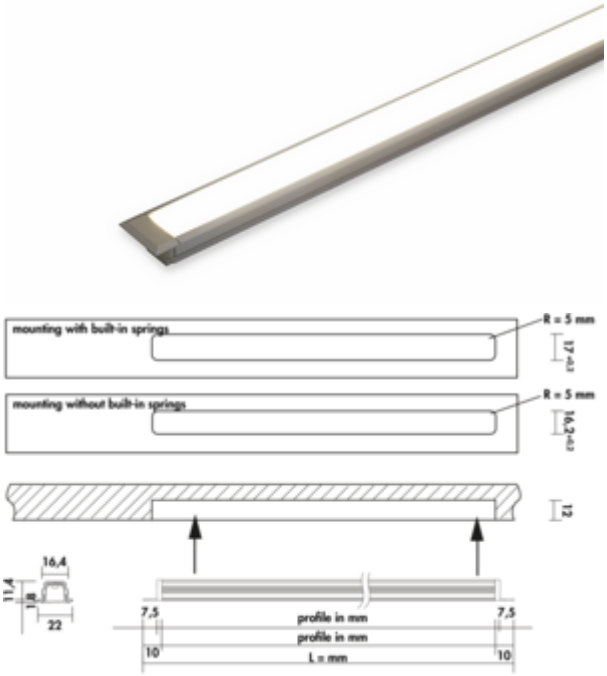

Ricol colour change LED

Product number: 7061184
Configuration: single lamp without switch, L 2600 mm, stainless steel coloured

Configuration options

7060105 | single lamp without switch, L 2600 mm, black matt
7060106 | single lamp without switch, L 1500 mm, black matt
7061184 | single lamp without switch, L 2600 mm, stainless steel coloured
7061195 | single lamp without switch, L 1500 mm, stainless steel coloured

✓ Built-in lamp
✓ linear light
✓ 2700 K warm white to 6500 K cold white

Built-in lamp. Aluminium body, LED built-in profile, hidden cable routing with clamp fastening, no screws required.

Individual lamp without switch

— 15.5 watts per meter
— continuous control of the light colour from **2700 K** warm white to **6500 K** cold white
— max. 80 lumen/watt at **6000 K** cold white
— light length 2600 mm
— LED strip loose, not used in profile
— can be shortened every 25 mm, two-sided feed-in
— 2000 mm two-sided supply line
— 4 end caps enclosed separately
— connection to 12 V converter with colour change control
— installation depth 12 mm
— LIC 2.0/MEC LED system compatible

This product contains a light source of energy efficiency class F.

More information about the LIC/MEC LED system

more infos...

Naber GmbH
Enschedestr. 24
DE-48529 Nordhorn

Tel. +49 5921 704-0
Fax +49 5921 704-140
naber@naber.com

Technical data

Article type	Luminaire
Height	11,4 mm
Width	2.600 mm
Energy efficiency class	F
Transformer / converter required	Yes, must be ordered separately
Protection class	III
Mounting/Fixing	With concealed fastening clampable
Material housing	aluminium
Switch	No
Shortenability	may be shortened every 25 mm
Shape	angular
Length of the supply line (primary)	2.000 mm
More parts	incl. 4 end caps
Installation depth	12 mm

Illuminant included	Yes
Housing colour	stainless-steel coloured
Colour temperature	2700 K warm white to 6500 K cold white
Colour temperature adjustable	stepless
LIC system compatible	Yes
Illuminant type	LED
Replaceable illuminant	Yes
Light yield	max. 80 lumen/watt at 6000 K cold white
With spring clips for installation in cavity ceilings	Yes
Connection	On both sides
Homogeneous light field without visible LED points	Yes
Design	Built-in lamp linear light
Power per metre	15.5 watts

Naber GmbH
Enschedestr. 24
DE-48529 Nordhorn

Tel. +49 5921 704-0
Fax +49 5921 704-140
naber@naber.com