




PRIME flow P-Turbo flow 150 wall conduct incl. THERMOBOX

Product number: 4051065

Configuration: white, stainless steel

Configuration options

4051065 | white, stainless steel

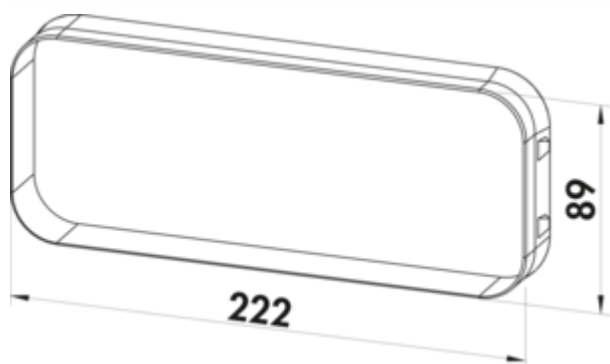

- ✓ Wall sleeve
- ✓ installation in the wall
- ✓ N-click system with integrated latching elements

Wall conduct, incl. THERMOBOX heat retention system and **Turbo stainless steel external blind** for installation close to the ground and for conventional installation at ceiling height.

Two-stage installation:

1. Assembly of the separately packaged construction kit
2. Toolless insertion of the heat retention system and the blind

- N-Klick system for secure connection with the universal connector
- direct connection of the flat adapter, round pipe or round pipe bends
- Blower-Door certified (necessary opening pressure >65 Pa)

Raw construction set:

- raw construction set for installation in the wall at any time
- max. wall thickness 550 mm, can be shortened to 220 mm
- core hole drilling in nominal Ø 162 or 164 mm
- hard foam plugs to protect against dirt during the construction phase
- wall sleeve for tool-free installation and sealing against leakage



[more infos...](#)

Technical data

Article type	Wall sleeve	Outer diameter	150 mm
Brand	PRIME flow	Suitable wall thickness	max. wall thickness 550 mm
Material	stainless steel/plastic	Wall box version	wall conduct, incl. THERMOBOX heat retention system and Turbo stainless steel external blind for installation close to the ground and for conventional installation at ceiling height
Properties	can be shortened	System dimension	150
Mounting/Fixing	installation in the wall N-click system with integrated latching elements	Output drive	angular
Suitable for	direct connection of the flat adapter, round pipe or round pipe bends	Ventilation system	COMPAIR PRIME flow®
Shortenability	can be shortened to 220 mm	Opening pressure	> 65 Pa
Shape	round	Rohbauset	raw construction set for installation in the wall at any time max. wall thickness 550 mm, can be shortened to 220 mm core hole drilling in nominal Ø 162 mm polystyrene plugs to protect against dirt during the construction phase wall sleeve for tool-free installation and sealing against leakage

Pos.	Anzahl	Artz.	Bezeichnung	Artikel-Nr.	Werkstoff
1	1		Flansch 150 L500	404009	PVC
2	1		P-Turbo Aufgipplaste	404070	Nickelverester Stahl (1.4301)
3	1		Wandflase	405019	LD-PE
4	1		Thermoblock 150	404004	PS
5	1		Maßstabsmodell 150	405100	PP1020

Technische Zeichnung

1: Maßstab 1:100
2: Maßstab 1:100
3: Maßstab 1:100
4: Maßstab 1:100
5: Maßstab 1:100

Materialangaben:
1: PVC
2: Nickelverester Stahl (1.4301)
3: LD-PE
4: PS
5: PP1020

Maße:
Länge: 220 - 550 mm
Flanschdicke: 33 mm
Flanschdurchmesser: 222 mm
Körperdurchmesser: 179 mm

Querschnitt A-A:
Ø 190 mm
89 mm
Ø 151.6 mm

Bestellnummer: 4051065

Hersteller: Ncbor

Produktname: P-Turbo flow 150 Maerk

Material: PVC

Werkstoff: PVC

Maßstab: 1:100

Zeichnungsdatum: 1.4.2008

Zeichner: 1

Geprüft: 1

Freigegeben: 1

Technische Zeichnung

Bestellnummer: 4051065

Hersteller: Ncbor

Produktname: P-Turbo flow 150 Maerk

Material: PVC

Werkstoff: PVC

Maßstab: 1:100

Zeichnungsdatum: 1.4.2008

Zeichner: 1

Geprüft: 1

Freigegeben: 1