


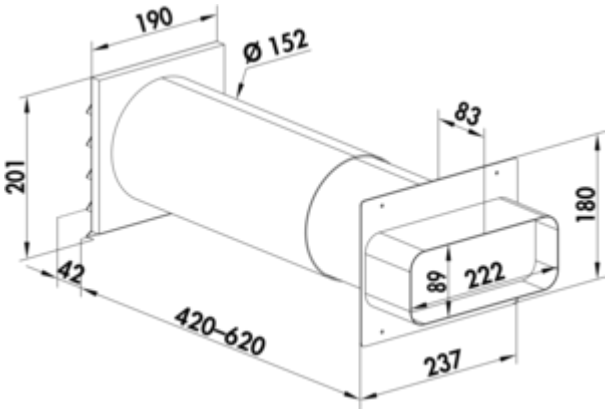

Klima-E flow 150 wall conduct

Product number: 4022040
Configuration: white, stainless steel

Configuration options
4022040 | white, stainless steel

✓ Wall sleeve
✓ installation in the wall

Stainless-steel external blind with backpressure shutter.
With rectangular connector for COMPAIR® flow 150.
— tube connector 227 x 94 mm
— connector depth 80 mm
— installation depth 420–620 mm, can be shortened to 210 mm
— wall penetration Ø about 155 mm

EDELSTAHL® Rostfrei

more infos...

Technical data

Article type	Wall sleeve
Material	stainless steel
Properties	can be shortened
Mounting/Fixing	installation in the wall
Certification	stainless
Shortenability	can be shortened to 210 mm
Shape	angular
Support depth	80 mm

Diameter wall opening	155 mm
Connection diameter	150 mm
Installation depth	420–620 mm
Wall box version	stainless steel external blind with backflow trap rectangular connector for COMPAIR® flow 150
Pipe socket dimension	pipe connector 227 x 94 mm
System dimension	150
Output drive	angular
Ventilation system	COMPAIR flow 150

Dimensional sketch (PDF)

