

KWC Domo E2

Product number: 5022131

Configuration: stainless steel

Configuration options


5022131 | stainless steel

- ✓ Sink faucet
- ✓ high pressure
- ✓ Swivelling

Single lever faucet. With swivelling/pull-out hose with shower head (can be switched to stream or shower) and ceramic cartridge.

— swivel range 120°

— drill Ø 35 mm

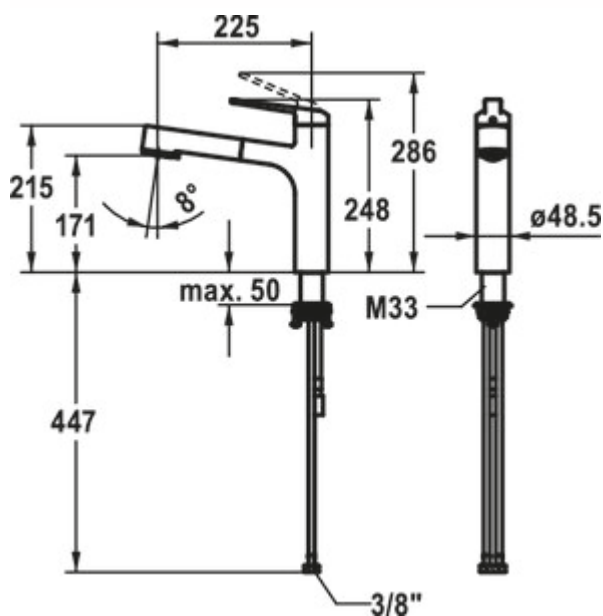

[more infos...](#)


Technical data

Article type	Sink faucet	Operating pressure	high pressure
Brand	KWC	Width	48,5 mm
Number of handles	1	Material	stainless steel
Total installation height	248 mm	Hose thread	3/8"
Outreach	225 mm	Worktop thickness	50 mm
Outlet	Swivelling Extractable	TouchProtect	Yes
Discharge height	171 mm	Number of tap holes	1
Operating mode	Lever	Temperature limiter/scald protection	Yes
Drilling diameter	35 mm	Convertible jet/shower	Yes
Handle position	top	Spring-guided hose shower	No
Manufacturer's warranty	5 years manufacturer's warranty 10-year after-sales guarantee on spare parts	Anti-limestone jet regulator	Yes
Cartridge with ceramic sealing discs	Yes	Angle of inclination of aerator	8 °
Swivel range outlet	120°	Temperature adjustable	Yes
Factory customer service	Yes	Type of hose shower	Integrated hose spray
Type of fitting	Single lever faucet		

Dimensional sketch (PDF)

KWC DOMO E

KWC



KWC-Nr.	Oberfläche
10.701.033.700FL	edelstahl
A 225, flexible Anschlusschläuche	


Küche

EDELSTAHL
 STAINLESS STEEL

Hebelmischer

- TouchProtect - Schutz vor Verbrennungen durch Zweischalenprinzip
- Eigensicher gegen Rückfließen
- Auszugbrause
 - SprayClean - aktive Kalkbeseitigung und schnelle Siebreinigung
 - bis 600 mm ausziehbar
 - TripleClean - Umstellbar zwischen Normal-, Soft- und Powerstrahlmodus
 - Schlauchoberfläche passend zu Armatoberfläche
 - QuickConnect - Einfaches Schlauchstecksystem
- Schlauchdurchführung, schwenkbar 120°
- EasyLock - einfache Auszugsbrauserückführung
- OptimalSpace - grosszügiger Wasch- / Arbeitsbereich
- KWC Steuerpatrone M 35 S
 - mit Keramikscheibentechnik
 - Auslaufmenge und Temperatur stufenlos einstellbar
 - Temperaturbegrenzung
- Flexible Anschlusschläuche 3/8"
- QuickInstallation - Befestigung mit Gewindestutzen M33 x 1.5 mit Feststellschrauben
- Tischbohrung ø35 mm

Sortiments, Modell- und technische Änderungen vorbehalten. Massangaben in mm.



www.kwc.com 15.01.2021