

LINEA Sottile 2 bathroom

Product number: 5011295

Configuration: chrome, high pressure

Configuration options

5011295 | chrome, high pressure

5011296 | black matt, high pressure

✓ Washbasin tap


✓ high pressure

Single lever faucet. With ceramic cartridge. With drain fitting Klick-Komfort.

Particularly suitable for use with top mounted washbasins.

— swivel range 360°

— drill Ø 35 mm

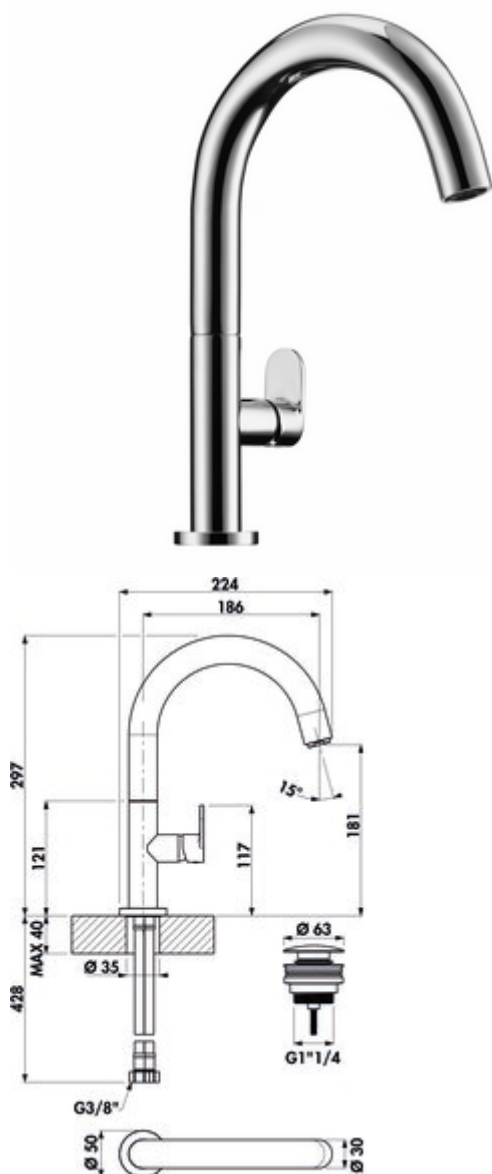

[more infos...](#)

Technical data

| | | | |
|--------------------------------------|---|--|---|
| Article type | Washbasin tap | Suitable for | Particularly suitable for use with top-mounted washbasins |
| Brand | LINEA | Worktop thickness | 40 mm |
| Number of handles | 1 | Swivel range handle | 360 ° |
| Total installation height | 297 mm | Excenter fitting | With drain fitting Klick-Komfort (without spill-over) |
| Outreach | 186 mm | Number of tap holes | 1 |
| Discharge height | 181 mm | Cartridge size | 25 mm |
| Operating mode | Lever | Minimum distance wall to centre tap hole | 5 mm |
| Drilling diameter | 35 mm | Angle of inclination of aerator | 15 ° |
| Handle position | right | Flow rate at 3 bar (cold) | 6,4 l/min |
| Manufacturer's warranty | 5 years manufacturer's warranty (except on wearing parts) 10-year after-sales guarantee on spare parts Your claim to customer service during the warranty period will be settled individually by agreement. | Flow rate at 3 bar (hot) | 6,52 l/min |
| Cartridge with ceramic sealing discs | Yes | Flow rate at 3 bar (spray mix) | 8,42 l/min |
| Type of fitting | Single lever faucet | Connection type | G 3/8" F |
| Operating pressure | high pressure | Connection size | DN 15 |
| Width | 50 mm | Connection hoses | 450 mm |
| Material | brass | | |