


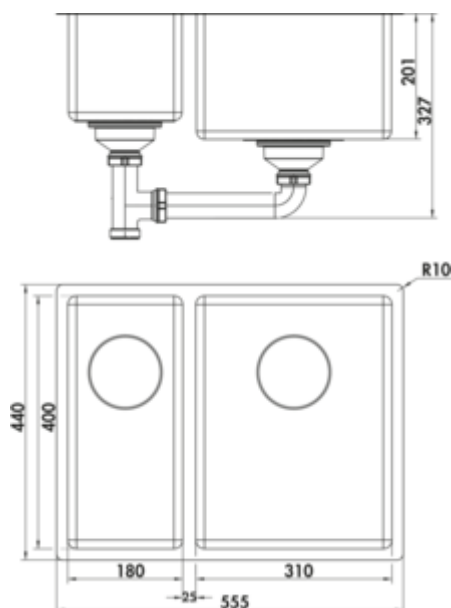

Corno Piu PFU11

Product number: 1013121

Configuration: stainless steel, bowl left

Configuration options

1013120 | stainless steel, bowl right

1013121 | stainless steel, bowl left

- ✓ Built-in sink
- ✓ Flush mounted sink
- ✓ Sub-structure bowl

Built-in/sub-structure sink. With half sink. Both bowls with 3½" drain and spill-over fitting and basket strainer valve flush with the bottom. When using the mounting brackets supplied, the installation width required increases by approx. 30 mm per side in case of the sub-structure sink.

Flat edge: also suitable for flush installation

- suitable for worktop thicknesses from 10–40 mm (built-in sink) and 20 mm (sub-structure sink)
- cut-out dimensions ca. 545 x 430 mm (built-in sink)
- cut-out dimensions ca. 515 x 400 mm (substructure sink)
- **without half sink insert**



[more infos...](#)

Technical data

Article type	Sink	Deep half sink	400 mm
Height	327 mm	Main sink width	310 mm
Width	555 mm	Height main sink	201 mm
Material	stainless steel	Depth main sink	400 mm
Note	when using the mounting brackets supplied, the installation width required increases by approx. 30 mm per side in case of the sub-structure sink	Flushing radius (R)	10
Cabinet width	600 mm	Maximum worktop material thickness	40 mm
Cut-out dimension	approx. 545 x 430 mm (built-in sink) approx. 515 x 400 mm (substructure sink)	Material thickness worktop minimum	10 mm
Worktop thickness	The sinks are suitable for worktop thicknesses from 10–40 mm (built-in sink) and from 20 mm (sub-structure sink)	Armature bench	No
Excenter fitting	Drain and spill-over fitting	Arrangement sinks	Bowl left
Valve type	3 1/2" flush bottom strainer basket valve	Number of sinks	1 main sink and 1 half sink
Overflow	Overflow in the main basin Overflow in the residual basin	Number of overflow points	2
Installation variant	Built-in sink Flush mounted sink Sub-structure bowl	Sound insulation	Yes
Height half sink	171 mm	Pelvic inner radius (R)	12
Wide half sink	180 mm	half sink	Yes without half sink insert

Spare Parts

1010047	Drain and spillover valve, Accessory, 3½", for Corno Piu PFU 11
---------	---

The technical drawing illustrates the Naber Pfu PF-U11 safe from three perspectives: front, side, and top. The front view shows a double-door design with a total width of 555 mm and a depth of 440 mm. The doors are 310 mm wide and 180 mm high, with a 25 mm gap between them. The top view shows a total width of 555 mm and a depth of 400 mm. The side view shows a total height of 201 mm and a depth of 171 mm. The drawing includes labels for R10 (top radius), R12 (door radius), and A (door handle). The safe is shown in a light gray color with a black handle and lock mechanism.

