

## KWC Inox 4

Product number: 5022317

Configuration: stainless steel, high pressure

### Configuration options



5022317 | stainless steel, high pressure

- ✓ Sink faucet
- ✓ high pressure
- ✓ Swivelling

Single lever faucet with swivelling/pull-out outlet (from metal) and ceramic cartridge.

— swivel range 130°

— drill Ø 35 mm

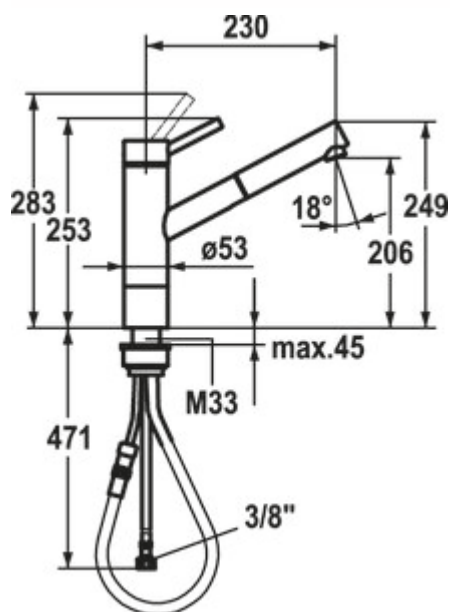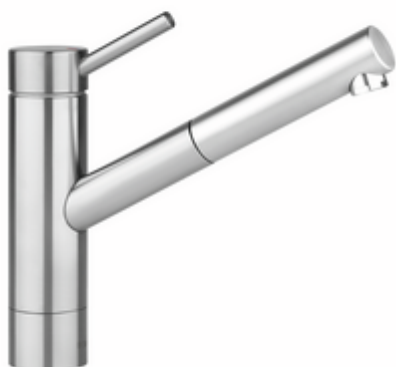

**BELGAQUA**




[more infos...](#)

## Technical data

|                                      |                                                                                    |                                      |                     |
|--------------------------------------|------------------------------------------------------------------------------------|--------------------------------------|---------------------|
| Article type                         | Sink faucet                                                                        | Type of fitting                      | Single lever faucet |
| Brand                                | KWC                                                                                | Operating pressure                   | high pressure       |
| Number of handles                    | 1                                                                                  | Width                                | 53 mm               |
| Total installation height            | 253 mm                                                                             | Material                             | stainless steel     |
| Outreach                             | 230 mm                                                                             | Hose thread                          | 3/8"                |
| Outlet                               | Swivelling<br>Extractable                                                          | Worktop thickness                    | 45 mm               |
| Discharge height                     | 206 mm                                                                             | TouchProtect                         | Yes                 |
| Operating mode                       | Lever                                                                              | Number of tap holes                  | 1                   |
| Drilling diameter                    | 35 mm                                                                              | Temperature limiter/scald protection | Yes                 |
| Handle position                      | top                                                                                | Spring-guided hose shower            | No                  |
| Manufacturer's warranty              | 5 years manufacturer's warranty<br>10-year after-sales guarantee on<br>spare parts | Length shower hose                   | 700 mm              |
| Cartridge with ceramic sealing discs | Yes                                                                                | Angle of inclination of aerator      | 18 °                |
| Swivel range outlet                  | 130°                                                                               | Temperature adjustable               | Yes                 |
| Factory customer service             | Yes                                                                                |                                      |                     |

## Dimensional sketch (PDF)

## KWC INOX


**KWC**

|                                   |            |
|-----------------------------------|------------|
| KWC-Nr.                           | Oberfläche |
| <b>10.271.303.700FL</b>           | edelstahl  |
| A 230, flexible Anschlusschläuche |            |

## Küche

- Hebelmischer
- Sockel 50 mm
  - TouchProtect - Schutz vor Verbrennungen durch Zweischalenprinzip
  - Auszugauslauf
    - Neoperl® Cascade®
    - bis 700 mm ausziehbar
    - Schlauchoberfläche passend zu Armatoberfläche
  - Schlauchdurchführung, schwenkbar 130°
  - EasyLock - einfache Auszugbrausenrückführung
  - OptimalSpace - grosszügiger Wasch- / Arbeitsbereich
  - KWC Steuerpatrone L 39 - Universal
    - mit Keramikscheibentechnik
    - Auslaufmenge und Temperatur stufenlos einstellbar
    - Temperatur- und Mengenbegrenzung
  - Flexible Anschlusschläuche 3/8"
  - Befestigung mit Gewindestutzen M33 x 1.5
  - Tischbohrung ø35 mm

Auslaufmenge 12 l/min (3 bar)  
Armaturengeräuschgruppe I

Sortiments-, Modell- und technische Änderungen vorbehalten. Massangaben in mm.

www.kwc.com 20.11.2020