



KWC Domo 6 window fitting

Product number: 5022170

Configuration: chrome, high pressure

Configuration options

5022170 | chrome, high pressure


- ✓ Sink faucet
- ✓ high pressure
- ✓ Swivelling

Single lever faucet with swivelling/pull-out hose with shower head (can be switched to stream or shower) and ceramic cartridge.

— height when tilted only 55 mm

— swivel range 120°

— drill Ø 35 mm

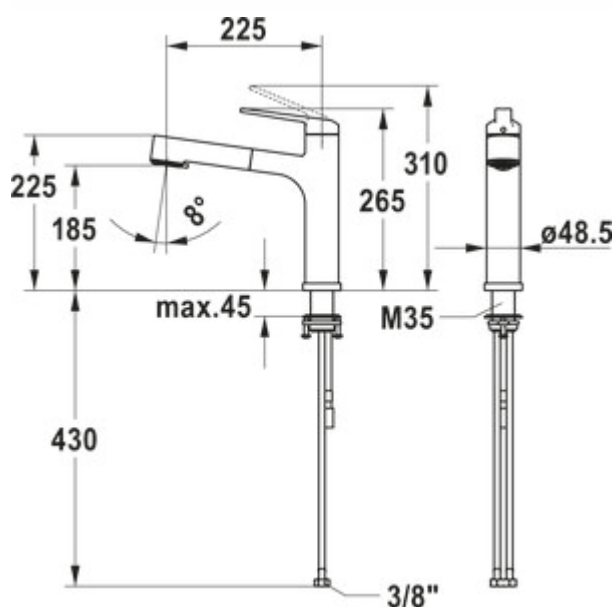

[more infos...](#)


Technical data

Article type	Sink faucet	Width	48,5 mm
Brand	KWC	Material	brass
Number of handles	1	Worktop thickness	45 mm
Total installation height	265 mm	Window fitting	Yes
Outreach	225 mm	TouchProtect	Yes
Outlet	Swivelling Extractable	Number of tap holes	1
Discharge height	185 mm	Temperature limiter/scald protection	Yes
Operating mode	Lever	Convertible jet/shower	Yes
Drilling diameter	35 mm	Spring-guided hose shower	No
Handle position	top	Length shower hose	600 mm
Manufacturer's warranty	5 years manufacturer's warranty 10-year after-sales guarantee on spare parts	Height tilted	55 mm
Cartridge with ceramic sealing discs	Yes	Anti-limestone jet regulator	Yes
Swivel range outlet	120°	Angle of inclination of aerator	8 °
Factory customer service	Yes	Temperature adjustable	Yes
Type of fitting	Single lever faucet	Type of hose shower	Integrated hose spray
Operating pressure	high pressure		

Dimensional sketch (PDF)

KWC DOMO | 6.0

KWC



KWC-Nr.	Oberfläche
10.661.053.000FL	ganzchrom
A 225, flexible Anschlussschläuche, wegnehmbar	

Küche wegnehmbar

Hebelmischer

- Wegnehmbar für Unterfenstermontage - Einbaumaß 55 mm
- TouchProtect - Schutz vor Verbrennungen durch Zweischalenprinzip
- Eigensicher gegen Rückfließen
- Auszugbrause
 - SprayClean - aktive Kalkbeseitigung und schnelle Siebreinigung
 - bis 600 mm ausziehbar
 - TripleClean - Umstellbar zwischen Normal-, Soft- und Powerstrahlmodus
 - Schlauchoberfläche passend zu Armaturoberfläche
- Schlauchdurchführung, schwenkbar 120°
- EasyLock - einfache Auszugbrausenrückführung
- OptimalSpace - grosszügiger Wasch- / Arbeitsbereich
- KWC Steuerpatrone M 35 S
 - mit Keramikscheibentechnik
 - Auslaufmenge und Temperatur stufenlos einstellbar
 - Temperaturbegrenzung
- Flexible Anschlussschläuche 3/8"
- Befestigung mit Gewindestutzen M35 x 1.5 (Vormontagesockel)
- Tischbohrung ø35 - 37 mm

Sortiments, Modell- und technische Änderungen vorbehalten. Massangaben in mm.

www.kwc.com 02.12.2020