

KWC Eve 1

Product number: 5022168

Configuration: stainless steel, high pressure

Configuration options

5022167 | chrome, high pressure

5022168 | stainless steel, high pressure

✓ Sink faucet

✓ high pressure

✓ Swivelling

Single lever faucet. With swivelling outlet, side lever and ceramic cartridge.

— LEDs integrated in the shower head illuminate the water jet and create a captivating light sculpture

— At the push of a button, LED-Shine stages a dance of light with the faucet's water jet. After 45 minutes, the light switches off automatically.

— adjustable shower head fitted seamlessly into the outlet

— TouchProtect – protection against burns through the two-shell principle


— Easy Lock – simple return of the pull-out shower head

— hose surface matches the faucet surface

— lever can be positioned on the right or left

— swivel range 320°

— drill Ø 35 mm

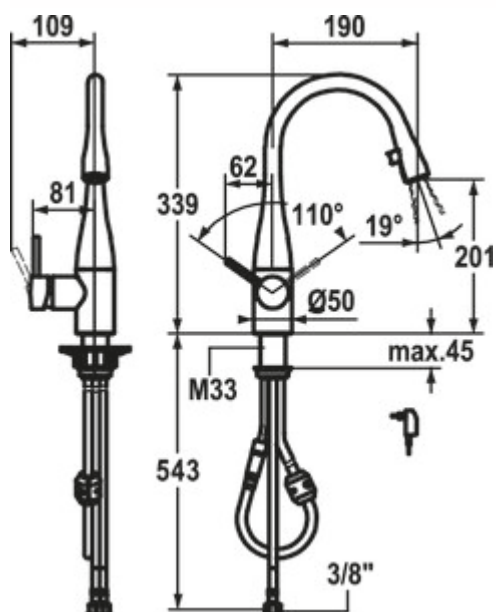

BELGAQUA




[more infos...](#)

Technical data

Article type	Sink faucet	Width	50 mm
Brand	KWC	Material	stainless steel
Number of handles	1	Mains voltage	100–240 V
Total installation height	339 mm	Further	LEDs integrated in the shower head illuminate the water jet and create a captivating light sculpture At the push of a button, LED-Shine stages a dance of light with the faucet's water jet. After 45 minutes, the light switches off automatically. Easy Lock – simple return of the pull-out shower head hose surface matches the faucet surface
Outreach	190 mm		
Outlet	Swivelling Extractable		
Discharge height	201 mm		
Operating mode	Lever	Hose thread	3/8"
Drilling diameter	35 mm	Worktop thickness	45 mm
Handle position	left or right	Swivel range handle	110 °
Lever length	62 mm	TouchProtect	Yes
Manufacturer's warranty	5 years manufacturer's warranty 10-year after-sales guarantee on spare parts	Number of tap holes	2
Cartridge with ceramic sealing discs	Yes	Temperature limiter/scald protection	Yes
Swivel range outlet	320°	Convertible jet/shower	Yes
Factory customer service	Yes	Spring-guided hose shower	No
Type of fitting	Single lever faucet	Angle of inclination of aerator	19 °
Operating pressure	high pressure	Temperature adjustable	Yes
		With mains plug	Yes
		Type of hose shower	Integrated hose spray

Dimensional sketch (PDF)

KWC EVE



KWC

DESIGNPREIS
2006
NOMINEEreddot design award
winner 2005product
design
award
2006

KWC-Nr.	Oberfläche
10.121.102.000FL	ganzchrom
A 190, flexible Anschlussschläuche, Netz AP	
10.121.102.700FL	edelstahl
A 190, flexible Anschlussschläuche, Netz AP	

Küche mit LEDShine

LUMINAQUA®
Advanced Light TechnologyEDELSTAHL
STAINLESS STEEL

Hebelmischer

- Positionierung des Hebels rechts oder links möglich
- TouchProtect - Schutz vor Verbrennungen durch Zweischalenprinzip
- Auszugauslauf verdeckt
 - Neoperl® Caché®
 - integrierter ON/OFF Taster mit Abschaltautomatik nach 45 Minuten
 - bis 600 mm ausziehbar
 - Schlauchoberfläche passend zu Armaturoberfläche
- Schlauchdurchführung, schwenkbar 320°
- EasyLock - einfache Auszugbrausenrückführung
- KWC Steuerpatrone M 35
 - mit Keramikscheibentechnik
 - Auslaufmenge und Temperatur stufenlos einstellbar
- Flexible Anschlussschläuche ½"
- Befestigung mit Gewindestutzen M33 x 1.5
- Tischbohrung ø35 mm
- Lieferumfang:
 - Steckernetzteil 100-240 V / Betriebsspannung 6.75 V / Kabellänge 1100 mm

Auslaufmenge 10 l/min (3 bar)
Armaturengeräuschgruppe I

Sortiments-, Modell- und technische Änderungen vorbehalten. Massangaben in mm.

www.kwc.com 08.01.2021