

## Wasserwerk Portare 2

Product number: 5021305

Configuration: black matt, high pressure

### Configuration options

5021303 | chrome, high pressure

5021304 | stainless steel coloured, high pressure

5021305 | black matt, high pressure



✓ Sink faucet

✓ high pressure

✓ Swivelling


Single lever faucet. With swivelling/pull-out outlet, side lever, ceramic cartridge and scald protection.

— energy-saving cold start function

— swivel range 360°

— drill Ø 35 mm

— corresponds to the German and European drinking water regulation/directive

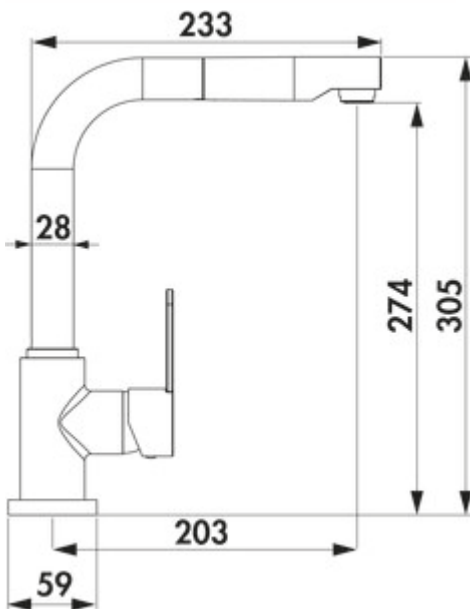

**BELGAQUA**



[more infos...](#)

## Technical data

|                                      |                                                                                                                  |                                          |                                   |
|--------------------------------------|------------------------------------------------------------------------------------------------------------------|------------------------------------------|-----------------------------------|
| Article type                         | Sink faucet                                                                                                      | Type of fitting                          | Single lever faucet               |
| Brand                                | Wasserwerk                                                                                                       | Operating pressure                       | high pressure                     |
| Number of handles                    | 1                                                                                                                | Width                                    | 59 mm                             |
| Total installation height            | 305 mm                                                                                                           | Material                                 | brass                             |
| Outreach                             | 203 mm                                                                                                           | Surface/coating                          | powder coated                     |
| Outlet                               | Swivelling<br>Extractable                                                                                        | Number of tap holes                      | 1                                 |
| Discharge height                     | 274 mm                                                                                                           | Hoses preassembled                       | Yes                               |
| Operating mode                       | Lever                                                                                                            | ECO function                             | energy-saving cold start function |
| Drilling diameter                    | 35 mm                                                                                                            | Temperature limiter/scald protection     | Yes                               |
| Handle position                      | right                                                                                                            | Spring-guided hose shower                | No                                |
| Manufacturer's warranty              | 10 years manufacturer's warranty<br>(except on wearing parts)<br>15-year after-sales guarantee on<br>spare parts | Minimum distance wall to centre tap hole | 0 mm                              |
| Cartridge with ceramic sealing discs | Yes                                                                                                              | Anti-limestone jet regulator             | Yes                               |
| Swivel range outlet                  | 360°                                                                                                             | Aerated aerator                          | Yes                               |
| Factory customer service             | Factory customer service in<br>Germany and Austria                                                               | Max. Flow rate at 3 bar                  | 9,3 l/min                         |