


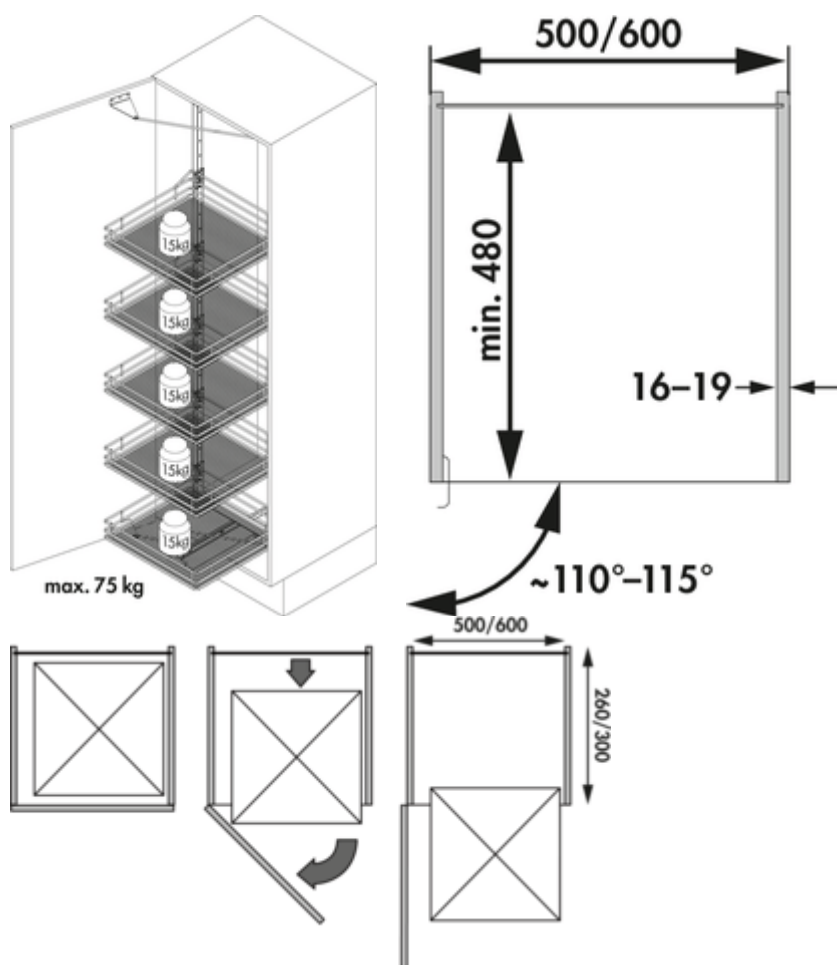

## VS TAL Gate frame

Product number: 8037162

Configuration: 500 mm cabinet, H 1700–1950 mm, up to 5 baskets, anthracite

### Configuration options

- 8037043 | 500 mm cabinet, H 1700–1950 mm, up to 5 baskets, silver
- 8037044 | 500 mm cabinet, H 1900–2140 mm, up to 5 baskets, silver
- 8037047 | 600 mm cabinet, H 1700–1950 mm, up to 5 baskets, silver
- 8037048 | 600 mm cabinet, H 1900–2140 mm, up to 5 baskets, silver
- 8037162 | 500 mm cabinet, H 1700–1950 mm, up to 5 baskets, anthracite
- 8037163 | 500 mm cabinet, H 1900–2140 mm, up to 5 baskets, anthracite
- 8037164 | 600 mm cabinet, H 1700–1950 mm, up to 5 baskets, anthracite
- 8037165 | 600 mm cabinet, H 1900–2140 mm, up to 5 baskets, anthracite

- ✓ Tall cupboard pull-out
- ✓ Cabinet width: 500 mm

For larger cupboard drawer VS TAL Gate.

- cabinet widths 500 and 600 mm
- installation depth min. 480 mm
- installation height 1700 to 2140 mm
- support frame height telescopic
- tool-free mounting of the frame on the lower runner
- tool-free connection between the cam and support frame
- load capacity of the system max. 75 kg
- individual height adjustment of the 5 baskets
- can be mounted left or right

### Please note:

Runners and baskets need to be ordered separately!

[more infos...](#)

### Technical data

|                 |                                                                                                               |                        |                                 |
|-----------------|---------------------------------------------------------------------------------------------------------------|------------------------|---------------------------------|
| Article type    | Tall cupboard pull-out                                                                                        | Telescopic function    | support frame height telescopic |
| Height          | 1.700 - 1.950 mm                                                                                              | For sidewall thickness | 16-19 mm                        |
| Mounting/Fixing | tool-free mounting of the frame on the lower runner<br>tool-free connection between the cam and support frame | Installation depth     | min. 480 mm                     |
| Note            | Runners and baskets need to be ordered separately!                                                            | Door opening angle     | 110–115°                        |
| Cabinet width   | 500 mm                                                                                                        |                        |                                 |