



GREENflow flexi-duct

Product number: 4043093

Configuration: L 1000 mm


Configuration options

4043093 | L 1000 mm

4043096 | L 500 mm

✓ Hose

- flame retardant B1 (tested according to DIN EN 13501: Bs2, d0)
- wire core with spring-back property produces gentle bending radii (flow-optimised)
- 227 x 94 mm
- optimised for connection to GREENflow filter box
- silver
- Pay attention to the even-walled, tight laying of the flexi duct!

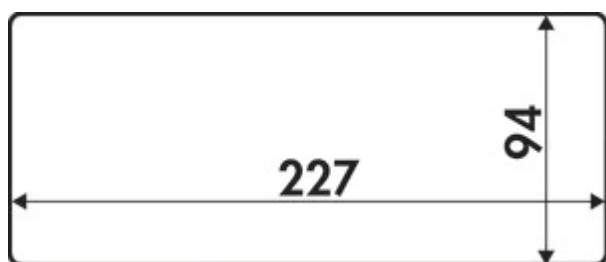

[more infos...](#)

Technical data

Article type	Hose
Width	1.000 mm
Properties	flame retardant B1
Note	Pay attention to the even-walled, tight laying of the flexi duct!

Further	wire core with spring-back property produces gentle bending radii (flow-optimised)
Temperature application range	−20 °C to +60 °C
Suitable for	optimised for connection to GREENflow filter box
Ventilation system	COMPAIR flow 150