

Corno Turno 60

Product number: 1041001
Configuration: set (sink and Turno faucet)

Configuration options
1041001 | set (sink and Turno faucet)

✓ Built-in sink
✓ Flush mounted sink
✓ Eccentric set

Built-in sink. 3½" basket strainer valve flush with push-button excenter fitting. With single-lever mixer integrated into the bowl wall, stainless steel finish, swivel spout 180°, 120° rotating.

— **flat edge: also suitable for flush mounting**
— suitable for worktop thicknesses from 10 mm to 40 mm
— cut-out approx. 535 x 495 mm (built-in sink)
— bowl depth 200 mm
— with integrated single-lever mixer, stainless steel finish, high pressure
— infinitely 180° swivelling and positioning
— vertical water outlet in every position of the faucet
— ergonomic operation by single-lever mixer at the outlet end
— windows can be planned on worktop level and are simply opened

Design by tbSTUDIO, Berlin.

more infos...

Technical data

Article type	Sink	Main sink width	500 mm
Height	305 mm	Height main sink	400 mm
Width	550 mm	Depth main sink	200 mm
Material	stainless steel	Flushing radius (R)	10
Designer	Design by tbSTUDIO, Berlin	Maximum worktop material thickness	40 mm
Cabinet width	600 mm	Material thickness worktop minimum	10 mm
Cut-out dimension	approx. 535 x 495 mm (built-in sink)	Number of sinks	1 main sink
Excenter fitting	Eccentric set	Number of overflow points	1
Valve type	3½" basket strainer valve flush	Sound insulation	Yes
Overflow	Overflow in the main basin	Garnish actuation	Push-button eccentric
Installation variant	Built-in sink Flush mounted sink	Pelvic inner radius (R)	12


Spare Parts

1013057	Rotational knob excenter fitting, Drain fittings, stainless steel, for Corno Turno 50/60

Naber GmbH
Enschedestr. 24
DE-48529 Nordhorn

Tel. +49 5921 704-0
Fax +49 5921 704-140
naber@naber.com

Dimensional sketch (PDF)

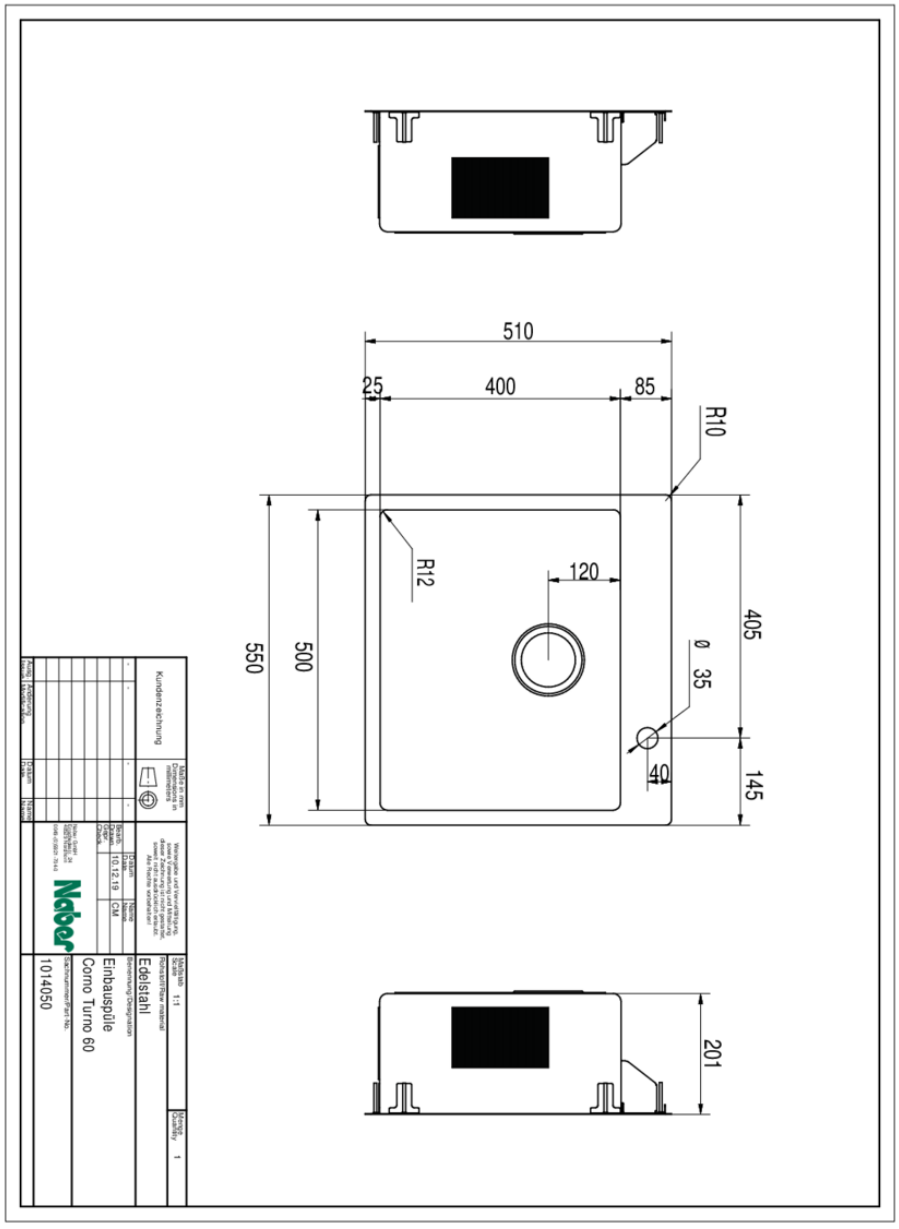

Installation dimensions (PDF)

