

Forato LED aluminium coloured

Product number: 7062381

Configuration: single lamp w. s. d., 4000 K neutral white

Configuration options

7062350 | single lamp without switch, 3000 K warm white

7062351 | single lamp w. s. d., 3000 K warm white

7062352 | set-2, 3000 K warm white

7062353 | set-3, 3000 K warm white

7062354 | set-5, 3000 K warm white


7062380 | single lamp without switch, 4000 K neutral white

7062381 | single lamp w. s. d., 4000 K neutral white

7062382 | set-2, 4000 K neutral white

7062383 | set-3, 4000 K neutral white

7062384 | set-5, 4000 K neutral white

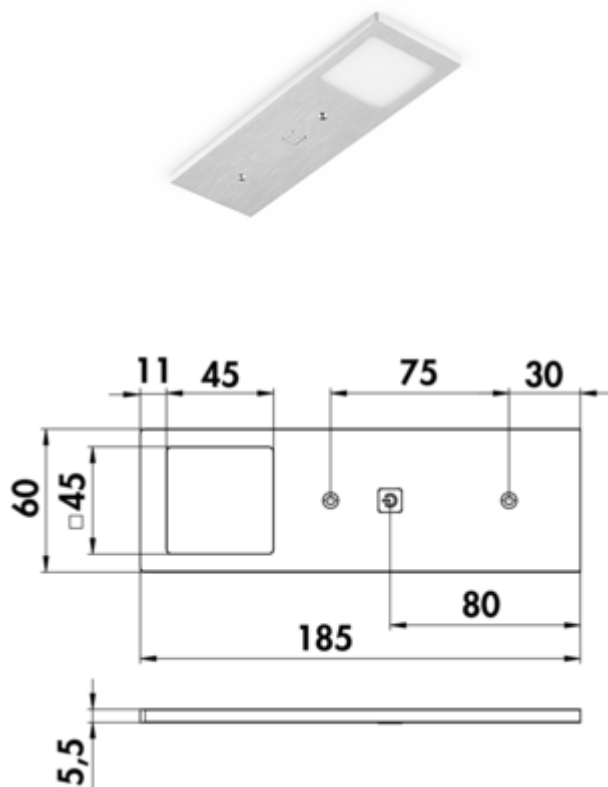

✓ Under-cabinet/niche light

✓ 4000 K neutral white

✓ 3 watts

Lamp for mounting from below Aluminium housing, **aluminium coloured**. Illumination without visible LED points with integrated switch. (screwed through)

Individual lamp without or with switch and dimmer (w. s. d.)

— 3 watt, 12 V, two colour ranges: **3000 K** warm white, **4000 K** neutral white

— 85 lumen/watt

— 200 mm supply line, 1800 mm connecting line with mini-plug-in system

Set 2, 3, 5 with switch consisting of:

— 1, 2 or 4 individual lamps without switch (7062350/7062380)

— 1 individual lamp with switch (7062351/7062381)

— 1 LED converter 20 (7062309)

— may be extended to 6 lamps

This product contains a light source with the energy efficiency class F.



[more infos...](#)

Technical data

Article type	Luminaire	Dimmer	Yes
Height	5,5 mm	Housing colour	aluminium
Width	185 mm	Colour temperature	4000 K neutral white
Energy efficiency class	F	Plug-in system	with mini plug-in system
Transformer / converter required	Yes, must be ordered separately	Illuminant type	LED
Mounting/Fixing	Base unit installation (wall unit/ shelf) can be screwed down	Replaceable illuminant	No
Material housing	aluminium	Light yield	85 lumen/watt
Length of connection cable (secondary)	1.800 mm	Homogeneous light field without visible LED points	Yes
Certification	CE	Touch function	Yes
Switch	Yes	Design	Under-cabinet/niche light
Shape	angular	Dimming function (composite)	Yes
Length of the supply line (primary)	200 mm	Illuminant power	3 watts
Illuminant included	Yes		