


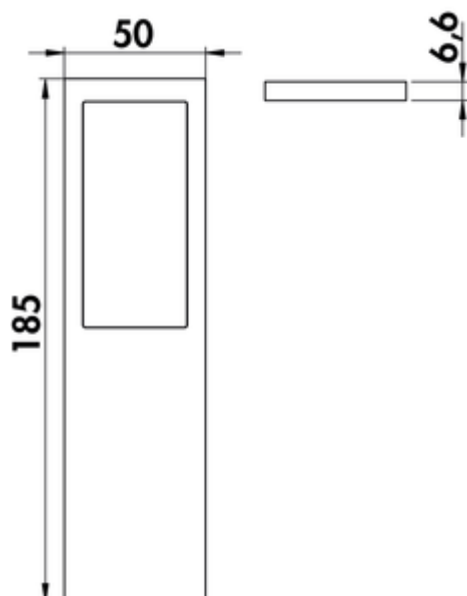

Livello colour change LED

Product number: 7062325

Configuration: set 5, aluminium coloured

Configuration options

- 7062320 | single lamp without switch, LIC/MEC LED system compatible, aluminium coloured
- 7062321 | single lamp with switch, aluminium coloured
- 7062322 | set 2, aluminium coloured
- 7062323 | set 3, aluminium coloured
- 7062325 | set 5, aluminium coloured
- 7062330 | single lamp without switch, LIC/MEC LED system compatible, black
- 7062331 | single lamp with switch, black
- 7062332 | set 2, black
- 7062333 | set 3, black
- 7062335 | set 5, black

- ✓ Under-cabinet/niche light
- ✓ 2700 K warm white to 6500 K cold white
- ✓ 4 watts

Lamp mounted from below. Aluminium body, illumination without visible LED points.

Individual lamp without or with switch

- 4 watts, 12 V
- continuous control of the light colour from **2700 K** warm white to **6500 K** cold white
- memory function: the last setting is stored
- dimmer function: brightness continuously dimmable
- max. 78 lumen/watt at **6500 K** cold white
- 1800 mm supply line with mini-plug-in system

Set 2, 3, 5 with switch consisting of:

- 1, 2 or 4 individual lamps without switch (7062320/7062330)
- 1 individual lamp with switch (7062321/7062331)
- 1 LED converter 20 (7062309)
- may be extended to 5 lamps

This product contains a light source of energy efficiency class F.

More information about the LIC/MEC LED system



[more infos...](#)

Technical data

Article type	Luminaire	Dimmer	Yes
Height	6,6 mm	Housing colour	aluminium coloured
Width	185 mm	Colour temperature	2700 K warm white to 6500 K cold white
Energy efficiency class	F	Colour temperature adjustable	stepless
Transformer / converter required	Yes, included	Type of dimming	brightness continuously dimmable
Mounting/Fixing	Base unit installation (wall unit/shelf)	Plug-in system	with mini plug-in system
Material housing	aluminium	Illuminant type	LED
Certification	CE	Replaceable illuminant	No
Switch	Yes	Light yield	max. 85 lumen/watt at 6500 K cold white
Shape	angular	Homogeneous light field without visible LED points	Yes
Memory function	Yes	Design	Under-cabinet/niche light
Length of the supply line (primary)	1.800 mm	Dimming function (composite)	Yes, brightness continuously dimmable
Illuminant included	Yes	Illuminant power	4 watts