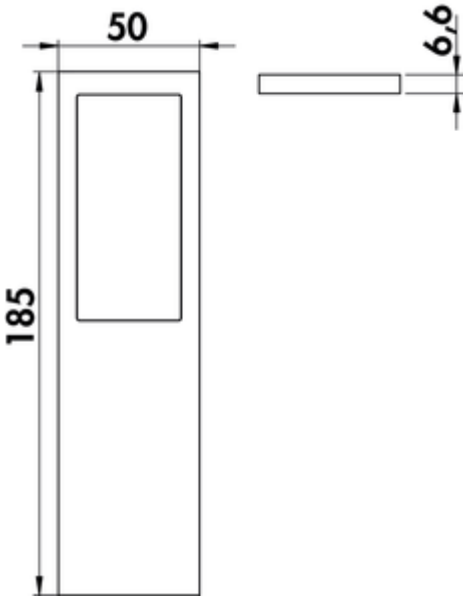


Livello colour change LED

Product number: 7062325
Configuration: set 5, aluminium coloured

Configuration options

7062320 | single lamp without switch, LIC 2.0/MEC LED system compatible, aluminium coloured
7062321 | single lamp with switch, aluminium coloured
7062322 | set 2, aluminium coloured
7062323 | set 3, aluminium coloured
7062325 | set 5, aluminium coloured
7062330 | single lamp without switch, LIC 2.0/MEC LED system compatible, black
7062331 | single lamp with switch, black
7062332 | set 2, black
7062333 | set 3, black
7062335 | set 5, black

✓ Under-cabinet/niche light
✓ 2700 K warm white to 6500 K cold white
✓ 4 watts

Lamp mounted from below. Aluminium body, illumination without visible LED points.

Individual lamp without or with switch
— 4 watts, 12 V
— continuous control of the light colour from **2700 K** warm white to **6500 K** cold white
— max. 85 lumen/watt at **6500 K** cold white
— memory function: the last setting is stored
— dimmer function: brightness continuously dimmable
— 1800 mm supply line with mini-plug-in system

Set 2, 3, 5 with switch consisting of:
— 1, 2 or 4 individual lamps without switch (7062320/7062330)
— 1 individual lamp with switch (7062321/7062331)
— 1 LED converter 20 (7062309)
— may be extended to 5 lamps

This product contains a light source of energy efficiency class F.

More information about the LIC/MEC LED system

more infos...

Naber GmbH
Enschedestr. 24
DE-48529 Nordhorn

Tel. +49 5921 704-0
Fax +49 5921 704-140
naber@naber.com

Technical data

Article type	Luminaire
Height	6,6 mm
Width	185 mm
Energy efficiency class	F
Transformer / converter required	Yes, included
Mounting/Fixing	Base unit installation (wall unit/shelf)
Material housing	aluminium
Certification	CE
Switch	Yes
Shape	angular
Memory function	Yes
Length of the supply line (primary)	1.800 mm
Illuminant included	Yes

Dimmer	Yes
Housing colour	aluminium coloured
Colour temperature	2700 K warm white to 6500 K cold white
Colour temperature adjustable	stepless
Type of dimming	brightness continuously dimmable
Plug-in system	with mini plug-in system
Illuminant type	LED
Replaceable illuminant	No
Light yield	max. 85 lumen/watt at 6500 K cold white
Homogeneous light field without visible LED points	Yes
Design	Under-cabinet/niche light
Dimming function (composite)	Yes, brightness continuously dimmable
Illuminant power	4 watts