



Corno Piu PFU2

Product number: 1013124

Configuration: stainless steel

Configuration options

1013124 | stainless steel


1041133 | set (sink and Mio 3 faucet)

- ✓ Built-in sink
- ✓ Flush mounted sink
- ✓ Sub-structure bowl

Built-in/sub-structure sink. Single bowl. 3½" drain and spill-over fitting with basket strainer valve flush with the bottom. When using the mounting brackets supplied, the installation width required increases by approx. 30 mm per side in case of the sub-structure sink.

Flat edge: also suitable for flush installation

- suitable for worktop thicknesses from 10–40 mm (built-in sink) and 20 mm (sub-structure sink)
- cut-out dimensions ca. 370 x 430 mm (built-in sink)
- cut-out dimensions ca. 340 x 400 mm (substructure sink)

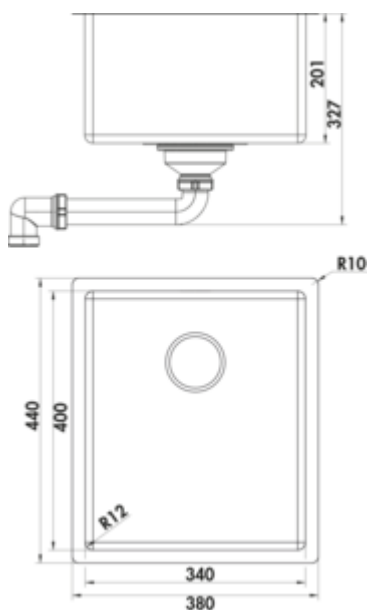

[more infos...](#)

Technical data

Article type	Sink	Main sink width	340 mm
Height	327 mm	Height main sink	201 mm
Width	380 mm	Depth main sink	400 mm
Material	stainless steel	Flushing radius (R)	10
Note	when using the mounting brackets supplied, the installation width required increases by approx. 30 mm per side in case of the sub-structure sink	Maximum worktop material thickness	40 mm
Cabinet width	450 mm	Material thickness worktop minimum	10 mm
Cut-out dimension	approx. 370 x 430 mm (built-in sink) approx. 340 x 400 mm (substructure sink)	Armature bench	No
Worktop thickness	The sinks are suitable for worktop thicknesses from 10–40 mm (built-in sink) and from 20 mm (sub-structure sink)	Number of sinks	1 main sink
Excenter fitting	Drain and spill-over fitting	Number of overflow points	1
Valve type	3 1/2" flush bottom strainer basket valve	Sound insulation	Yes
Overflow	Overflow in the main basin	Pelvic inner radius (R)	12
Installation variant	Built-in sink Flush mounted sink Sub-structure bowl		

Spare Parts

1010048	Drain and spillover valve, Accessory, 3½", for Corno Piu PFU 1–5
---------	--

Technical drawing of the Naber 1013124 safe, showing front, side, and top views with dimensions.

Front View: Shows the safe's front door with a handle (R10), a lock cylinder (R12), and a keyhole (110). The overall width is 440 mm, and the depth is 380 mm. The door thickness is 201 mm.

Side View: Shows the side profile of the safe, indicating a height of 340 mm and a depth of 380 mm.

Top View: Shows the top of the safe, indicating a width of 440 mm and a depth of 380 mm.

Dimensions:

- Overall width: 440 mm
- Overall depth: 380 mm
- Door thickness: 201 mm
- Internal width: 400 mm
- Internal depth: 340 mm
- Lock cylinder offset: 110 mm

Technical Drawing Details:

- Section line A-A is indicated.
- Reference numbers R10 and R12 are shown.

[illegible]