
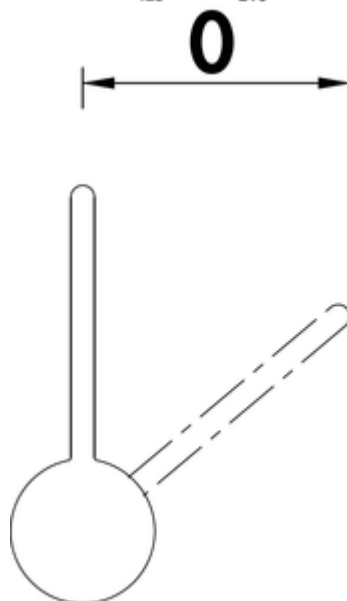



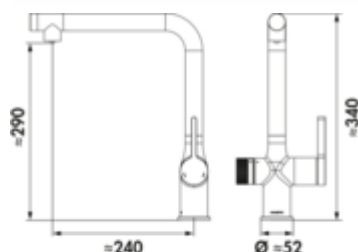

LINEA Aqvella system

Product number: 5021344

Configuration: stainless steel coloured, high pressure

Configuration options

5021344 | stainless steel coloured, high pressure

5021345 | black matt, high pressure

- ✓ Sink faucet
- ✓ high pressure
- ✓ energy-saving cold start function

Sparkling water single lever mixer faucet including cooling and filter system. With swivelling outlet, side lever, laminar jet regulator and ceramic cartridge.

— set consisting of faucet and technical unit (matt black) with cooling system, filter, filter head and **standard** CO₂ cartridge. (425 g)

— technical unit: 455 x 210 x 425 mm (H x W x D)

— separate turning handle on the left for sparkling (classic + medium), chilled and filtered (still) water, control lever on the right for tap water

— integrated LED ring shows the different water modes with different colours.

— water temperature flexibly adjustable between 4 and 12°C

— energy-saving technology unit with low power consumption

— swivel range 360°

— drill Ø 35 mm

— corresponds to the German and European drinking water regulation/directive



[more infos...](#)

Technical data

Article type	Sink faucet	Type of fitting	Single lever faucet
Brand	LINEA	Operating pressure	high pressure
Number of handles	2	Width	52 mm
Total installation height	340 mm	Further	incl. cooling and filter system Technical unit: 455 x 210 x 425 mm (H x W x D) separate rotary handle on the left for carbonated (Classic + Medium), chilled and filtered (Still) water Control lever right for tap water integrated LED ring indicates the different water modes through different colors
Height	340 mm	Temperature setting	Water temperature adjustable between 4 - 12 °C
Outreach	240 mm	Consisting of	Set consisting of fitting and technical unit (black matt) with cooling system, filter, filter head, and standard Co2 cartridge (425 g)
Discharge height	290 mm	Number of tap holes	1
Operating mode	Lever	Hoses preassembled	Yes
Drilling diameter	35 mm	Cartridge size	35 mm
Handle position	side lever	ECO function	energy-saving cold start function
Cartridge with ceramic sealing discs	Yes	Minimum distance wall to centre tap hole	0 mm
Swivel range outlet	360°	Connection hoses	600 mm
Beam type	Laminar beam		