


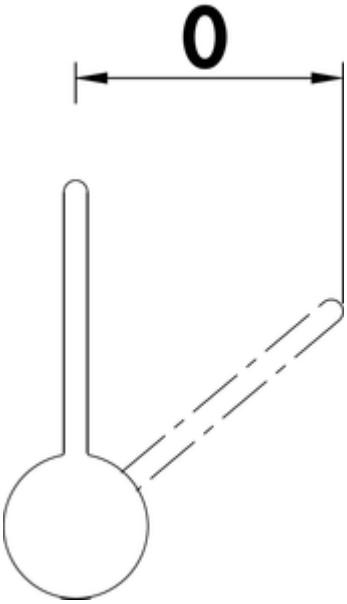

LINEA Aqvella system

Product number: 5021344
Configuration: stainless steel coloured, high pressure

Configuration options
5021344 | stainless steel coloured, high pressure
5021345 | black matt, high pressure

✓ Sink faucet
✓ high pressure
✓ energy-saving cold start function

Sparkling water single lever mixer faucet including cooling and filter system. With swivelling outlet, side lever, laminar jet regulator and ceramic cartridge.
— set consisting of faucet and technical unit (matt black) with cooling system, filter, filter head and **standard** CO_2 cartridge. (425 g)
— technical unit: 455 x 210 x 425 mm (H x W x D)
— separate turning handle on the left for sparkling (classic + medium), chilled and filtered (still) water, control lever on the right for tap water
— integrated LED ring shows the different water modes with different colours.
— water temperature flexibly adjustable between 4 and 12°C
— swivel range 360°
— drill Ø 35 mm
— corresponds to the German and European drinking water regulation/directive

KERAMISCHE DICHTUNG

Naber GmbH
Enschedestr. 24
DE-48529 Nordhorn

Tel. +49 5921 704-0
Fax +49 5921 704-140
naber@naber.com

more infos...

Technical data

Article type	Sink faucet
Brand	LINEA
Number of handles	2
Total installation height	340 mm
Height	340 mm
Outreach	240 mm
Discharge height	290 mm
Operating mode	Lever
Drilling diameter	35 mm
Handle position	side lever
Cartridge with ceramic sealing discs	Yes
Swivel range outlet	360°
Beam type	Laminar beam

Type of fitting	Single lever faucet
Operating pressure	high pressure
Width	52 mm
Further	incl. cooling and filter system Technical unit: 455 x 210 x 425 mm (H x W x D) separate rotary handle on the left for carbonated (Classic + Medium), chilled and filtered (Still) water Control lever right for tap water integrated LED ring indicates the different water modes through different colors
Temperature setting	Water temperature adjustable between 4 - 12 °C
Consisting of	Set consisting of fitting and technical unit (black matt) with cooling system, filter, filter head, and standard Co2 cartridge (425 g)
Number of tap holes	1
Hoses preassembled	Yes
Cartridge size	35 mm
ECO function	energy-saving cold start function
Minimum distance wall to centre tap hole	0 mm
Connection hoses	600 mm

Naber GmbH
Enschedestr. 24
DE-48529 Nordhorn

Tel. +49 5921 704-0
Fax +49 5921 704-140
naber@naber.com