

## Ideal Standard Cerafit 1

Product number: 5024151

Configuration: chrome, low pressure

### Configuration options

5024150 | chrome, high pressure

5024151 | chrome, low pressure


- ✓ Sink faucet
- ✓ low pressure
- ✓ with swivelling outlet

Single lever faucet. With swivelling outlet and ceramic cartridge.

— swivel range 360°

— drill Ø 35 mm

German  
Engineering

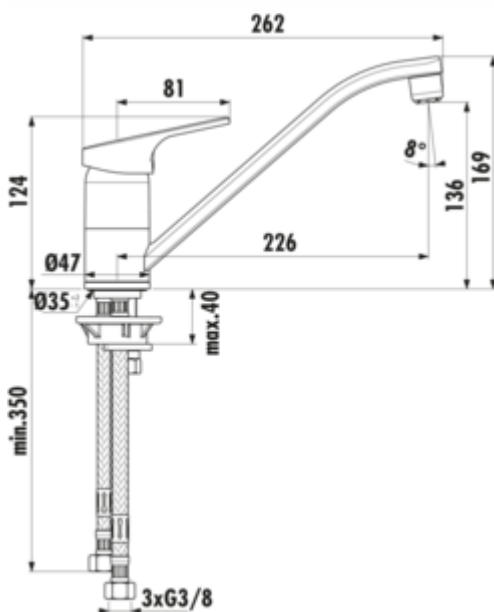

[more infos...](#)

### Technical data

Article type	Sink faucet	Swivel range outlet	360°
Brand	Ideal Standard	Type of fitting	Single lever faucet
Number of handles	1	Operating pressure	low pressure
Total installation height	169 mm	Width	47 mm
Height	169 mm	Material	brass
Outreach	226 mm	Worktop thickness	40 mm
Outlet	with swivelling outlet	Number of tap holes	1
Discharge height	138 mm	Cartridge size	38 mm
Operating mode	Lever	ECO function	Water saving function
Drilling diameter	35 mm	Temperature limiter/scald protection	Yes
Handle position	top	Angle of inclination of aerator	8 °
Lever length	81 mm	Flow rate at 3 bar (cold)	6 l/min
Cartridge with ceramic sealing discs	Yes		