



## Ideal Standard Ceraflex 5 window fitting

Product number: 5024166

Configuration: chrome, high pressure

### Configuration options

5024166 | chrome, high pressure

- ✓ Sink faucet
- ✓ high pressure
- ✓ with swivelling outlet


Single lever faucet. With swivelling outlet and ceramic cartridge.

— height when tilted only 25 mm

— swivel range 360°

— drill Ø 35 mm

German  
Engineering

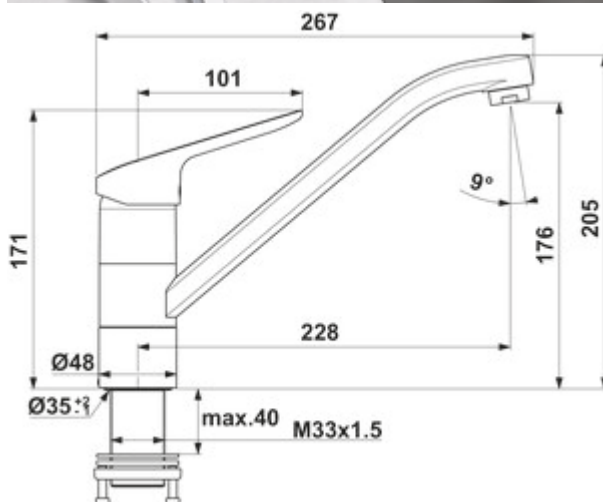

[more infos...](#)

### Technical data

Article type	Sink faucet	Swivel range outlet	360°
Brand	Ideal Standard	Type of fitting	Single lever faucet
Number of handles	1	Operating pressure	high pressure
Total installation height	205 mm	Width	48 mm
Outreach	228 mm	Material	brass
Outlet	with swivelling outlet	Worktop thickness	40 mm
Discharge height	176 mm	Window fitting	Yes
Operating mode	Lever	Number of tap holes	1
Drilling diameter	35 mm	Temperature limiter/scald protection	Yes
Handle position	top	Height tilted	25 mm
Lever length	101 mm	Angle of inclination of aerator	9 °
Cartridge with ceramic sealing discs	Yes	Flow rate at 3 bar (cold)	9 l/min

### Accessories

5031005 Dirt Filter Ecco 1, 3/8", chrome