



## Ideal Standard Ceraflex 5 window fitting

Product number: 5024166

Configuration: chrome, high pressure

### Configuration options

5024166 | chrome, high pressure

- ✓ Sink faucet
- ✓ high pressure
- ✓ with swivelling outlet


Single lever faucet. With swivelling outlet and ceramic cartridge.

— height when tilted only 25 mm

— swivel range 360°

— drill Ø 35 mm

German  
Engineering

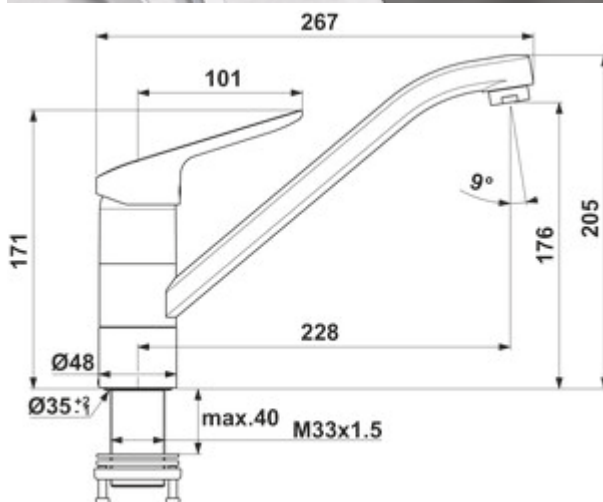

[more infos...](#)

### Technical data

Article type	Sink faucet	Swivel range outlet	360°
Brand	Ideal Standard	Type of fitting	Single lever faucet
Number of handles	1	Operating pressure	high pressure
Total installation height	205 mm	Width	48 mm
Height	205 mm	Material	brass
Outreach	228 mm	Worktop thickness	40 mm
Outlet	with swivelling outlet	Window fitting	Yes
Discharge height	176 mm	Number of tap holes	1
Operating mode	Lever	Temperature limiter/scald protection	Yes
Drilling diameter	35 mm	Height tilted	25 mm
Handle position	top	Angle of inclination of aerator	9 °
Lever length	101 mm	Flow rate at 3 bar (cold)	9 l/min
Cartridge with ceramic sealing discs	Yes		

### Accessories

5031005 Dirt Filter Ecco 1, 3/8", chrome