

Angola 40



Product number: 1106114

Configuration: granite magnolia

Configuration options


- 1106111 | granite nero
- 1106112 | granite espresso
- 1106113 | granite metallico
- 1106114 | granite magnolia
- 1106115 | granite concrete
- 1106116 | granite lava
- 1106117 | granite nero assoluto

- ✓ Built-in sink
- ✓ Flush mounted sink
- ✓ Composite

Built-in sink. Composite, single bowl. 3½" basket strainer valve flush with rotational ex-center fitting, chrome-plated. 3 pre-drilled holes, **drill holes must be completed during assembly.**

Also suitable for flush installation.

- suitable for worktop thicknesses from 22 mm to 44 mm
- cut-out dimensions ca. 380 x 480 mm (built-in sink)
- can also be used in combination with hot water fittings (+/-100 °C)

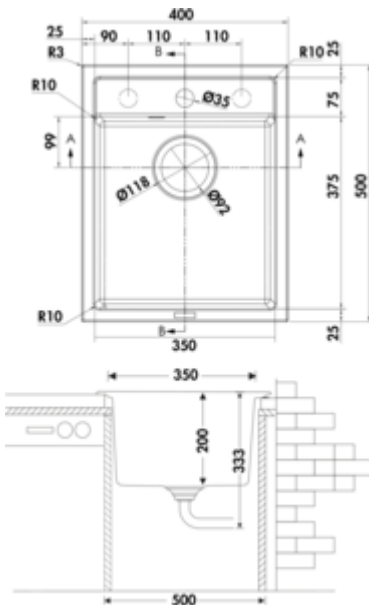


[more infos...](#)

Technical data

Article type	Sink	Height main sink	200 mm
Height	329 mm	Depth main sink	375 mm
Width	400 mm	Flushing radius (R)	3
Material	Composite	Maximum worktop material thickness	44 mm
Cabinet width	500 mm	Material thickness worktop minimum	22 mm
Suitable for	can also be used in combination with hot water fittings (+/-100 °C)	Armature bench	Yes
Cut-out dimension	approx. 380 x 480 mm	Number of holes	3 pre-drilled holes drill holes must be completed during assembly
Excenter fitting	Eccentric set, chrome-plated	Note fitting bore	pre-drilled
Valve type	3½" basket strainer valve flush	Number of sinks	1 main sink
Overflow	Overflow in the main basin	Number of overflow points	1
Installation variant	Built-in sink Flush mounted sink	Garnish actuation	Chrome-plated rotary eccentric
Main sink width	350 mm	Pelvic inner radius (R)	10

Spare Parts

1106066	Rotational excenter fitting, Drain fittings, 3½" basket strainer valve flush, for Angola 40
---------	---

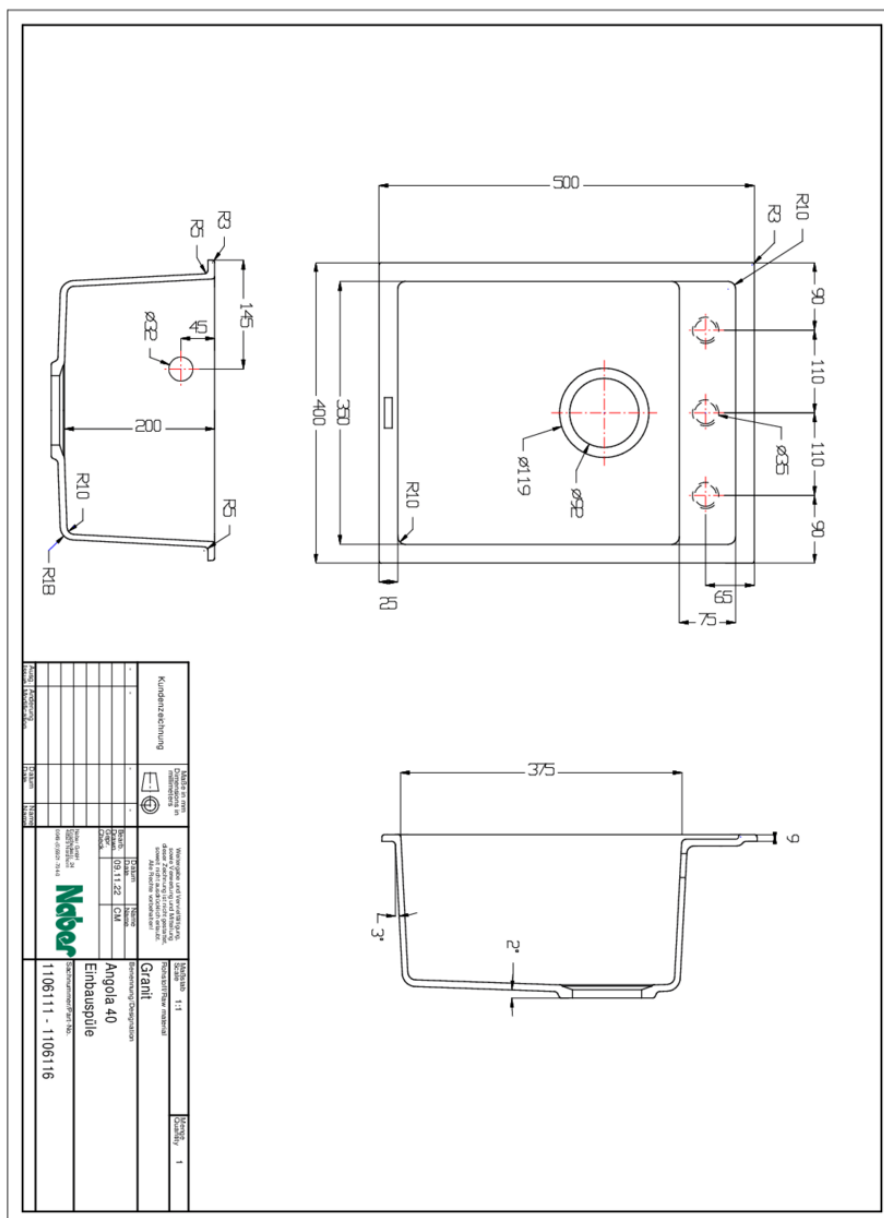

Installation dimensions (PDF)

