

## Manubrio colour change LED

Product number: 7061197

Configuration: single lamp, L 2600 mm, stainless steel coloured

### Configuration options

7060107 | single lamp, L 2600 mm, black matt

7060108 | single lamp, L 1500 mm, black matt

7061197 | single lamp, L 2600 mm, stainless steel coloured

7061298 | single lamp, L 1500 mm, stainless steel coloured

✓ LED Stripe

✓ Base light/niche light

✓ Handle strip lighting

Handle strip lighting. Plastic body, self-adhesive LED strip, can be shortened every 50 mm, no visible LED incl. holding clamps for handle strips.

### Individual lamp

— 7.8 watts per meter, 12 V

— continuous control of the light colour from **2700 K** warm white to **6500 K** cold white

— max. 80 lumen/watt at **6500 K** cold white

— 2000 mm two-sided supply line


— LED strip, two-sided feed-in

— incl. 4 end caps

— LIC/MEC LED system compatible

**This product contains a light source of energy efficiency class F.**

More information about the LIC/MEC LED system

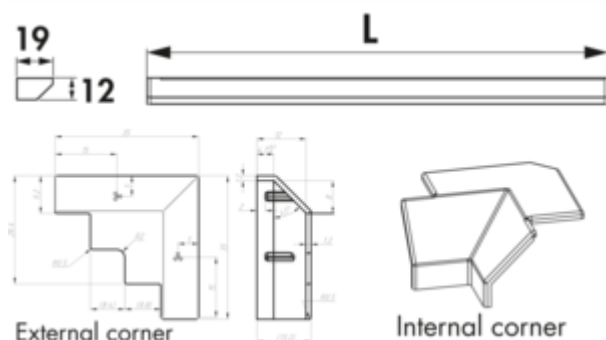

### Technical data

|                                     |                                          |                                                    |                                                               |
|-------------------------------------|------------------------------------------|----------------------------------------------------|---------------------------------------------------------------|
| Article type                        | LED stripe                               | Housing colour                                     | stainless-steel coloured                                      |
| Height                              | 12 mm                                    | Colour temperature                                 | 2700 K warm white to 6500 K cold white                        |
| Width                               | 2.600 mm                                 | Colour temperature adjustable                      | stepless                                                      |
| Energy efficiency class             | F                                        | LIC system compatible                              | Yes                                                           |
| Transformer / converter required    | Yes, must be ordered separately          | Illuminant type                                    | LED                                                           |
| Mounting/Fixing                     | self-adhesive                            | Replaceable illuminant                             | No                                                            |
| Material housing                    | plastic                                  | Light yield                                        | max. 80 lumen/watt at 6000 K cold white                       |
| Shortenability                      | may be shortened every 50 mm             | Connection                                         | On both sides                                                 |
| Shape                               | straight                                 | Homogeneous light field without visible LED points | Yes                                                           |
| Length of the supply line (primary) | 2.000 mm                                 | Design                                             | LED Stripe<br>Base light/niche light<br>Handle strip lighting |
| More parts                          | incl. holding clamps<br>incl. 4 end caps | Power per metre                                    | 7.8 watts                                                     |
| Illuminant included                 | Yes                                      |                                                    |                                                               |

[more infos...](#)