

## Namor® 5

Product number: 5025009

Configuration: stainless steel, with laminar aerator, high pressure


### Configuration options

5025009 | stainless steel, with laminar aerator, high pressure  
 5025010 | black matt, with laminar aerator, high pressure  
 5025038 | stainless steel, without laminar aerator, low pressure  
 5025039 | black matt, without laminar aerator, low pressure

- ✓ Sink faucet
- ✓ high pressure
- ✓ with swivelling outlet

Single lever mixer. With swivelling outlet, side lever and ceramic cartridge.

- swivel range 120°
- drill Ø 35 mm
- corresponds to the German and European drinking water regulation/directive

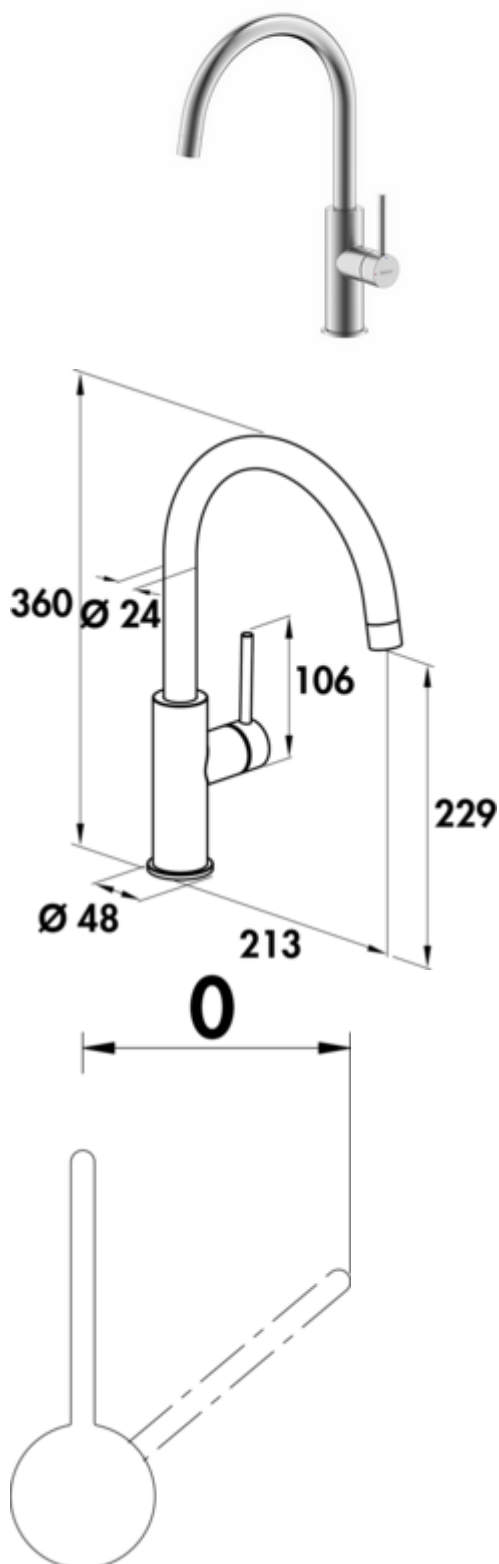

[more infos...](#)

## Technical data

|                                      |                        |                             |                                   |
|--------------------------------------|------------------------|-----------------------------|-----------------------------------|
| Article type                         | Sink faucet            | Type of fitting             | Single lever faucet               |
| Number of handles                    | 1                      | Operating pressure          | high pressure                     |
| Total installation height            | 360 mm                 | Width                       | 48 mm                             |
| Height                               | 360 mm                 | Material                    | stainless steel                   |
| Outreach                             | 213 mm                 | Swivel range handle         | 0 °                               |
| Outlet                               | with swivelling outlet | Cartridge size              | 25 mm                             |
| Discharge height                     | 229 mm                 | ECO function                | energy-saving cold start function |
| Operating mode                       | Lever                  | Max. Flow rate at 3 bar     | 12,5 l/min                        |
| Drilling diameter                    | 35 mm                  | Flow rate at 3 bar (cold)   | 9,5 l/min                         |
| Handle position                      | side lever             | Flow rate at 3 bar (hot)    | 9,5 l/min                         |
| Lever length                         | 106 mm                 | Flow rate at 3 bar (mix)    | 12,5 l/min                        |
| Cartridge with ceramic sealing discs | Yes                    | Size laminar flow regulator | M18,5x1                           |
| Swivel range outlet                  | 120°                   | Connection hoses            | 700 mm                            |
| Beam type                            | Laminar beam           |                             |                                   |

