


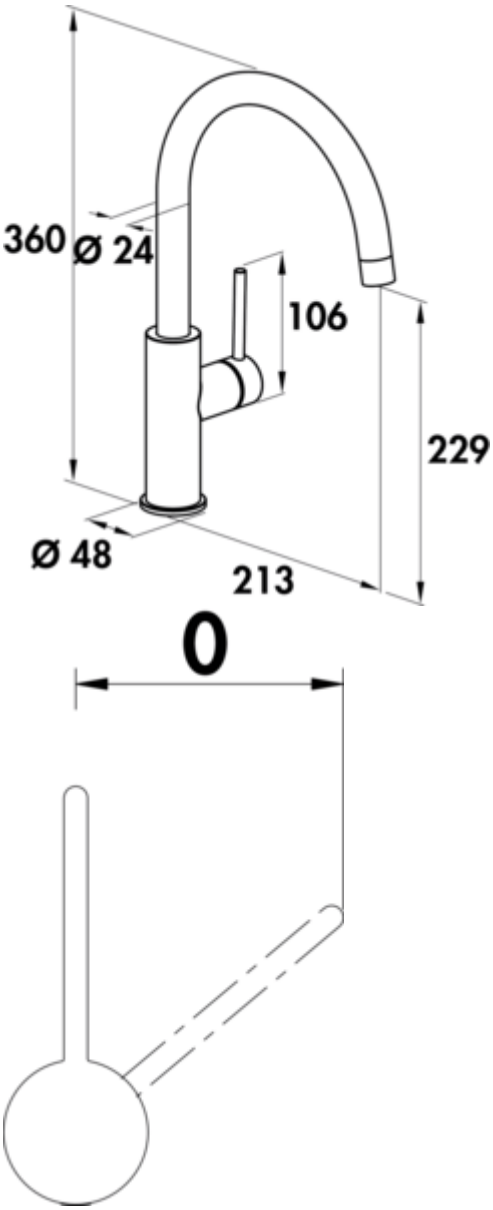

Namor® 5

Product number: 5025009
Configuration: stainless steel, with laminar aerator, high pressure

Configuration options

5025009 | stainless steel, with laminar aerator, high pressure
5025010 | black matt, with laminar aerator, high pressure
5025038 | stainless steel, without laminar aerator, low pressure
5025039 | black matt, without laminar aerator, low pressure
5025046 | brushed-gold, with laminar aerator, high pressure
5025047 | rosé-gold, with laminar aerator, high pressure

✓ Sink faucet
✓ high pressure
✓ with swivelling outlet

Single lever mixer. With swivelling outlet, side lever and ceramic cartridge.
— swivel range 120°
— drill Ø 35 mm
— corresponds to the German and European drinking water regulation/ directive

EDELSTAHL Rostfrei

KERAMISCHE DICHTUNG

more infos...

Naber GmbH
Enschedestr. 24
DE-48529 Nordhorn

Tel. +49 5921 704-0
Fax +49 5921 704-140
naber@naber.com

Technical data

Article type	Sink faucet
Number of handles	1
Total installation height	360 mm
Height	360 mm
Outreach	213 mm
Outlet	with swivelling outlet
Discharge height	229 mm
Operating mode	Lever
Drilling diameter	35 mm
Handle position	side lever
Lever length	106 mm
Cartridge with ceramic sealing discs	Yes
Swivel range outlet	120°
Beam type	Laminar beam

Type of fitting	Single lever faucet
Operating pressure	high pressure
Width	48 mm
Material	stainless steel
Note	corresponds to the German and European drinking water regulation/ directive
Swivel range handle	0 °
Cartridge size	25 mm
ECO function	energy-saving cold start function
Max. Flow rate at 3 bar	12,5 l/min
Flow rate at 3 bar (cold)	9,5 l/min
Flow rate at 3 bar (hot)	9,5 l/min
Flow rate at 3 bar (mix)	12,5 l/min
Size laminar flow regulator	M18,5x1
Connection hoses	700 mm

Dimensional sketch (PDF)

