


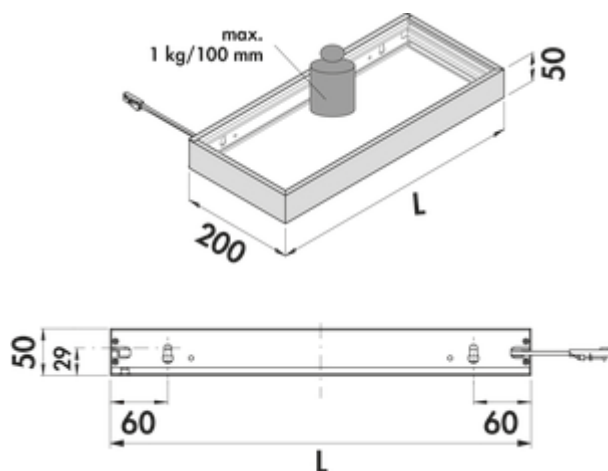

## Lista 50 colour change LED

Product number: 7062340

Configuration: L 450 mm, 3.1 W, stainless steel coloured

### Configuration options

- 7062340 | L 450 mm, 3.1 W, stainless steel coloured
- 7062341 | L 450 mm, 3.1 W, black matt
- 7062342 | L 600 mm, 4.3 W, stainless steel coloured
- 7062343 | L 600 mm, 4.3 W, black matt
- 7062344 | L 900 mm, 6.6 W, stainless steel coloured
- 7062345 | L 900 mm, 6.6 W, black matt
- 7062346 | L 1200 mm, 9 W, stainless steel coloured
- 7062347 | L 1200 mm, 9 W, black matt

- ✓ lit glass pane
- ✓ 2700 K warm white to 6500 K cold white
- ✓ angular

Lit glass shelf. Aluminium body, mat safety glass, with LED lighting, uniform illumination over the entire width upward and downward, free-hanging attachment up to a shelf depth of 200 mm, screws on the back, mounted invisibly. Converter not integrated in the lit glass shelf.

### Lit glass shelf

- 12 V, IP20
- continuous control of the light colour from 2700 K warm white to 6500 K cold white
- max. 64 lumen/watt at 6500 K cold white
- 2000 mm supply line with mini-plug-in system
- cable outlet rear left of lamp
- bearing capacity\* approx. 1 kg/100 mm
- incl. angle adjustment
- LIC LED system compatible

This product contains a light source of energy efficiency class G.

\*\_x0007\_ The load-bearing capacity depends on the wall condition. Suitable mounting material for the respective wall type is to be used.

More information about the LIC LED system



[more infos...](#)

## Technical data

|                                     |                                                                                                                                                                       |                                                    |                                         |
|-------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------|-----------------------------------------|
| Article type                        | lit glass pane                                                                                                                                                        | Housing colour                                     | stainless-steel coloured                |
| Width                               | 450 mm                                                                                                                                                                | Colour temperature                                 | 2700 K warm white to 6500 K cold white  |
| Energy efficiency class             | G                                                                                                                                                                     | Colour temperature adjustable                      | stepless                                |
| Transformer / converter required    | Yes, must be ordered separately                                                                                                                                       | LIC system compatible                              | Yes                                     |
| Protection class                    | IP20                                                                                                                                                                  | Plug-in system                                     | with mini plug-in system                |
| Protection class                    | III                                                                                                                                                                   | Illuminant type                                    | LED                                     |
| Mounting/Fixing                     | Wall mounting<br>screwable<br>Screw fastening                                                                                                                         | Replaceable illuminant                             | No                                      |
| Note                                | * The load-bearing capacity depends on the wall condition. Suitable mounting material for the respective wall type is to be used (not included in scope of delivery). | Light yield                                        | max. 64 lumen/watt at 6500 K cold white |
| Material housing                    | aluminium                                                                                                                                                             | Connection                                         | One-sided                               |
| Shape                               | angular                                                                                                                                                               | Cover colour                                       | transparent                             |
| Length of the supply line (primary) | 2.000 mm                                                                                                                                                              | Homogeneous light field without visible LED points | Yes                                     |
| Carrying capacity                   | approx. 1.0 kg/100 mm                                                                                                                                                 | Design                                             | lit glass pane                          |
| Illuminant included                 | Yes                                                                                                                                                                   | Illuminant power                                   | 3.1 watts                               |

## Accessories

|         |                                                                              |
|---------|------------------------------------------------------------------------------|
| 7061285 | 1-channel colour change remote control, white                                |
| 7061286 | FW function converter, module 2 (radio), 15 W, 4-way distributor             |
| 7061271 | FW function converter, module 2 (radio), 30 W, 6-way distributor             |
| 7061273 | FW function converter, module 2 (radio), 60 W, 6-way distributor             |
| 7061287 | FW function converter, module 3 (Bluetooth + radio), 15 W, 4-way distributor |
| 7061281 | FW function converter, module 3 (Bluetooth + radio), 30 W, 6-way distributor |
| 7061283 | FW function converter, module 3 (Bluetooth + radio), 60 W, 6-way distributor |
| 7061403 | MEC Driver LED converter, 60/72 W, 12/24 V                                   |
| 7061426 | MEC Driver LED 1-channel module radio/ZigBee, Accessory, 12 V                |
| 7061428 | MEC Driver LED 4-channel module radio/ZigBee, Accessory, 12 V                |
| 7061431 | MEC Driver LED remote control 1+4 channel ZigBee, white                      |