

Corno Piu PFU3

Product number: 1013123

Configuration: stainless steel

Configuration options

1013123 | stainless steel

1041134 | set (sink and Mio 3 faucet)



- ✓ Built-in sink
- ✓ Flush mounted sink
- ✓ Sub-structure bowl


Built-in/sub-structure sink. Single bowl. 3½" drain and spill-over fitting with basket strainer valve flush with the bottom. When using the mounting brackets supplied, the installation width required increases by approx. 30 mm per side in case of the sub-structure sink.

Flat edge: also suitable for flush installation

— suitable for worktop thicknesses from 10–40 mm (built-in sink) and 20 mm (sub-structure sink)

— cut-out dimensions ca. 430 x 430 mm (built-in sink)

— cut-out dimensions ca. 401 x 401 mm (substructure sink)

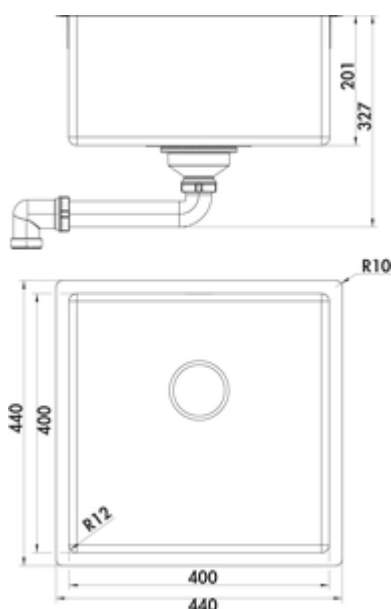

[more infos...](#)

Technical data

Article type	Sink	Main sink width	400 mm
Width	440 mm	Height main sink	201 mm
Material	stainless steel	Depth main sink	400 mm
Note	when using the mounting brackets supplied, the installation width required increases by approx. 30 mm per side in case of the sub-structure sink	Flushing radius (R)	10
Cabinet width	500 mm	Maximum worktop material thickness	40 mm
Cut-out dimension	approx. 430 x 430 mm (built-in sink) approx. 401 x 401 mm (substructure sink)	Material thickness worktop minimum	10 mm
Worktop thickness	The sinks are suitable for worktop thicknesses from 10–40 mm (built-in sink) and from 20 mm (sub-structure sink)	Armature bench	No
Excenter fitting	Drain and spill-over fitting	Number of sinks	1 main sink
Valve type	3 1/2" flush bottom strainer basket valve	Number of overflow points	1
Overflow	Overflow in the main basin	Sound insulation	Yes
Installation variant	Built-in sink Flush mounted sink Sub-structure bowl	Pelvic inner radius (R)	12

Accessories

1014046	Rotational knob excenter fitting, Accessory, for Corno Piu PFU 2–11
1013044	Drip tray large, Accessory, stainless steel
1013043	Drip tray small, Accessory, stainless steel
1013045	Cutting board made of plastic, white
1013041	Filo dish drainer, Accessory, stainless steel

Spare Parts

1010048	Drain and spillover valve, Accessory, 3 1/2", for Corno Piu PFU 1–5
---------	---

Recommendations

5011308	Mio 3, Sink faucet, chrome, high-pressure
1111141	Stainless steel system care, Cleaning agent,
1111142	Stainless steel cleaning agent Utral, Cleaning agent, 250 ml
1111143	Stainless steel care agent Edelglanz, Cleaning agent, 250 ml

Technical drawing of the Naber 103123 safe, showing front, side, and top views with dimensions.

Front View: Shows a square safe with a door. The door has a handle (A-A) and a lock mechanism. The door is labeled R10. The safe body is labeled R12. Dimensions: 440 (width), 400 (height), 110 (door thickness).

Side View: Shows the side profile of the safe. Dimensions: 201 (depth).

Top View: Shows the top of the safe. Dimensions: 440 (width), 400 (depth).

Section A-A: A cross-section view of the door handle and lock mechanism.

Front-mounted installation
 built-in fitting hole:
 430x430 R10 mm
 cabinet 500 mm

Flat-mounted installation
 built-in fitting hole:
 430x430 R10 mm
 cabinet 500 mm

Undermount installation
 undercap fitting hole:
 400x400 R12 mm
 n° holes 8
 10 mm depth 15 mm
 cabinet 600 mm

Dimensions:
 Front view: 442 (total), 430 (inner), R11 (corner), R10 (inner corner).
 Side view: 1.5 mm thickness.
 Detail A: Section through the cabinet wall.
 Undermount view: 400 (total), 200 (hole spacing), 25 (hole diameter), 90 (hole depth), 220 (hole diameter).