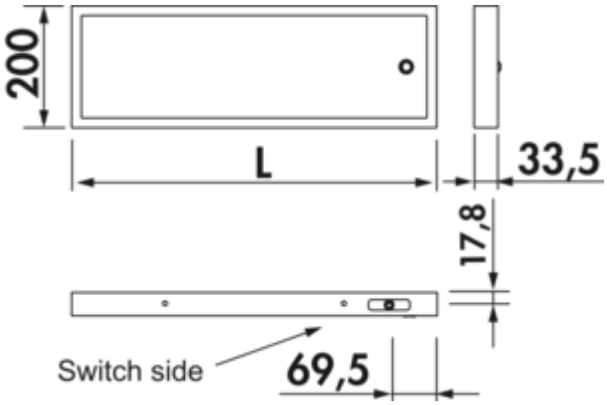


Lista 30 LED

Product number: 7062197
Configuration: L 900 mm, 8.2 W, black

Configuration options

7062065 | L 450 mm, 3.8 W, stainless steel coloured
7062066 | L 600 mm, 5.3 W, stainless steel
7062067 | L 900 mm, 8.2 W, stainless steel coloured
7062068 | L 1200 mm, 11 W, stainless steel coloured
7062195 | L 450 mm, 3.8 W, black matt
7062196 | L 600 mm, 5.3 W, black matt
7062197 | L 900 mm, 8.2 W, black
7062198 | L 1200 mm, 11 W, black matt

✓ lit glass pane
✓ 4200 K neutral white
✓ angular

Lit glass shelf. Aluminium body, **stainless steel coloured** or **black matt**, mat safety glass, with LED lighting, uniform illumination over the entire width upward and downward, free-hanging attachment up to a shelf depth of 200 mm, screws mounted invisibly on the back.

Lit glass shelf with switch
— **4200 K** neutral white
— 83 lumen/watt
— switch integrated into the bottom of the glass shelf
— **converter integrated into lit glass shelf**
— 2000 mm mains connection line with flat Euro plug enclosed separately
— cable outlet rear right of lamp
— bearing capacity approx. 10 kg
This product contains a light source of energy efficiency class G.

more infos...

Naber GmbH
Enschedestr. 24
DE-48529 Nordhorn

Tel. +49 5921 704-0
Fax +49 5921 704-140
naber@naber.com

Technical data

Article type	lit glass pane
Height	33,5 mm
Width	900 mm
Energy efficiency class	G
Transformer / converter required	Yes, included and integrable
Plug type	Flat plug
Mounting/Fixing	Screw fastening screwable Wall mounting
Material housing	aluminium
Switch	Yes
Surface/coating	matt
Shape	angular
Length of the supply line (primary)	2.000 mm
Carrying capacity	ca. 10 kg

Illuminant included	Yes
Housing colour	black matt
Colour temperature	4200 K neutral white
Illuminant type	LED
Replaceable illuminant	No
Light yield	83 lumen/watt
Connection	One-sided
Material cover	safety glass
Cover colour	glass (LSG matt)
Homogeneous light field without visible LED points	Yes
Design	lit glass pane
Illuminant power	8.2 watts

Naber GmbH
Enschedestr. 24
DE-48529 Nordhorn

Tel. +49 5921 704-0
Fax +49 5921 704-140
naber@naber.com