

KWC Eve 3

Product number: 5022164

Configuration: stainless steel, with LED lighting, high pressure

Configuration options

5022162 | chrome, with LED lighting, high pressure

5022164 | stainless steel, with LED lighting, high pressure

- ✓ Sink faucet
- ✓ high pressure
- ✓ Swivelling

Single lever faucet. With swivelling outlet, side lever and ceramic cartridge.

— LEDs integrated in the shower head illuminate the water jet and create a captivating light sculpture

— At the push of a button, LED-Shine stages a dance of light with the faucet's water jet. After 45 minutes, the light switches off automatically.

— adjustable shower head fitted seamlessly into the outlet

— switch from a full jet to a fine spray with just one press of the selection switch on the shower head

— TouchProtect – protection against burns through the two-shell principle


— Easy Lock – simple return of the pull-out shower head

— hose surface matches the faucet surface

— lever can be positioned on the right or left

— swivel range 320°

— drill Ø 35 mm

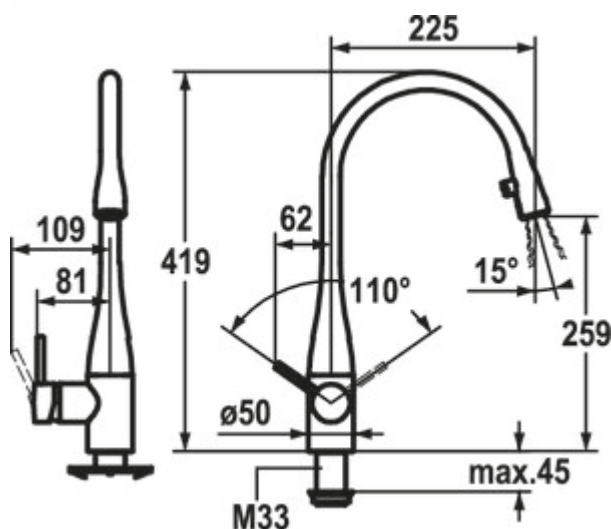

BELGAQUA




[more infos...](#)

Technical data

Article type	Sink faucet	Operating pressure	high pressure
Brand	KWC	Width	50 mm
Number of handles	1	Material	stainless steel
Total installation height	419 mm	Further	LEDs integrated in the shower head illuminate the water jet and create a captivating light sculpture At the push of a button, LED-Shine stages a dance of light with the faucet's water jet. After 45 minutes, the light switches off automatically. Easy Lock – simple return of the pull-out shower head hose surface matches the faucet surface
Outreach	225 mm		
Outlet	Swivelling Extractable		
Discharge height	259 mm		
Operating mode	Lever		
Drilling diameter	35 mm	Hose thread	3/8"
Handle position	left or right	Worktop thickness	45 mm
Lever length	62 mm	Swivel range handle	110 °
Manufacturer's warranty	5 years manufacturer's warranty 10-year after-sales guarantee on spare parts	TouchProtect	Yes
Cartridge with ceramic sealing discs	Yes	Number of tap holes	1
Swivel range outlet	320°	Temperature limiter/scald protection	Yes
Factory customer service	Yes	Convertible jet/shower	Yes
Type of fitting	Single lever faucet	Spring-guided hose shower	No
		Angle of inclination of aerator	15 °
		Temperature adjustable	Yes
		With mains plug	Yes
		Type of hose shower	Integrated hose spray

Dimensional sketch (PDF)

KWC EVE



KWC

DESIGNPREIS
2006

NOMINEE

reddot design award
winner 2006product
design
award
2006

KWC-Nr.	Oberfläche
10.121.103.000FL	ganzchrom
A 225, flexible Anschlussschläuche, Netz AP	
10.121.103.700FL	edelstahl
A 225, flexible Anschlussschläuche, Netz AP	

Küche mit LEDShine

LUMINAQUA®
Advanced Light TechnologyEDELSTAHL
STAINLESS STEEL

Hebelmischer

- Positionierung des Hebels rechts oder links möglich
- TouchProtect - Schutz vor Verbrennungen durch Zweischalenprinzip
- Auszugauslauf verdeckt
 - Neoperl® Caché®
 - integrierter ON/OFF Taster mit Abschaltautomatik nach 45 Minuten
 - bis 600 mm ausziehbar
 - Schlauchoberfläche passend zu Armaturoberfläche
- Schlauchdurchführung, schwenkbar 320°
- EasyLock - einfache Auszugbrausenrückführung
- OptimalSpace - grosszügiger Wasch- / Arbeitsbereich
- KWC Steuerpatrone M 35
 - mit Keramikscheibentechnik
 - Auslaufmenge und Temperatur stufenlos einstellbar
- Flexible Anschlussschläuche 3/8"
- Befestigung mit Gewindestutzen M33 x 1.5
- Tischbohrung ø35 mm
- Lieferumfang:
 - Steckernetzteil 100-240 V / Betriebsspannung 6.75 V / Kabellänge 1100 mm

Auslaufmenge 10 l/min (3 bar)
Armaturengeräuschgruppe I

Sortiments, Modell- und technische Änderungen vorbehalten. Massangaben in mm.

www.kwc.com 08.01.2021