



KWC Ono 3

Product number: 5022320

Configuration: chrome, high pressure

Configuration options

5022320 | chrome, high pressure

5022325 | stainless steel, high pressure

✓ Sink faucet


✓ high pressure

✓ Swivelling

Single lever faucet. With swivelling/pull-out outlet, side lever and ceramic cartridge.

— swivel range 360°

— drill Ø 35 mm

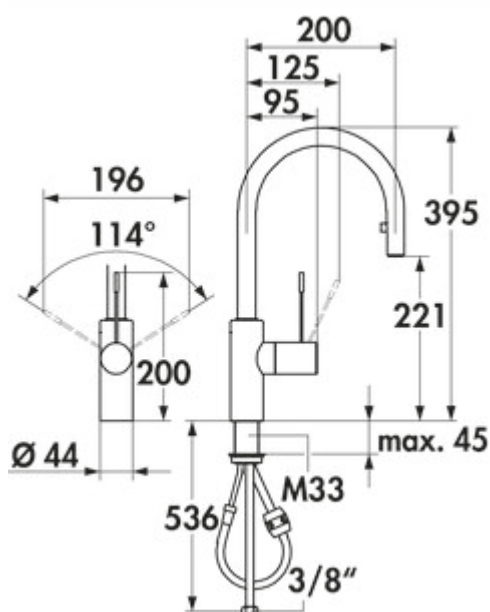

BELGAQUA



[more infos...](#)

Technical data


Article type	Sink faucet	Swivel range outlet	360°
Brand	KWC	Factory customer service	Yes
Number of handles	1	Type of fitting	Single lever faucet
Total installation height	395 mm	Operating pressure	high pressure
Outreach	200 mm	Width	44 mm
Outlet	Swivelling Extractable	Hose thread	3/8"
Discharge height	221 mm	Worktop thickness	45 mm
Operating mode	Lever	Swivel range handle	114 °
Drilling diameter	35 mm	TouchProtect	Yes
Handle position	right	Number of tap holes	1
Manufacturer's warranty	5 years manufacturer's warranty 10-year after-sales guarantee on spare parts	Spring-guided hose shower	No
Cartridge with ceramic sealing discs	Yes	Temperature adjustable	Yes

Accessories

5031005	Dirt Filter Ecco 1, 3/8", chrome
---------	----------------------------------

Dimensional sketch (PDF)

KWC ONO



KWC-Nr.	Oberfläche
10.151.102.000FL	ganzchrom
A 200, flexible Anschlussschläuche	
10.151.102.700FL	edelstahl
A 200, flexible Anschlussschläuche	

Küche

Hebelmischer

- Positionierung des Hebels rechts oder links möglich
- Bedienungshebel aus Medizinalstahl
- TouchProtect - Schutz vor Verbrennungen durch Zweischalenprinzip
- Auszugauslauf verdeckt
 - Neoperl® Caché®
 - bis 700 mm ausziehbar
 - Schlauchoberfläche passend zu Armatoberfläche
- Schlauchdurchführung, schwenkbar 360°
- EasyLock - einfache Auszugbrausenrückführung
- OptimalSpace - grosszügiger Wasch- / Arbeitsbereich
- KWC Steuerpatrone M 35 H
 - mit Keramikscheibentechnik
 - Auslaufmenge und Temperatur stufenlos einstellbar
- Flexible Anschlussschläuche ½"
- Befestigung mit Gewindestutzen M33 x 1.5
- Tischbohrung Ø35 mm
- Separat bestellen (optional oder falls erforderlich):
 - Kurzer Hebel, L 70 mm Z.535.995

Auslaufmenge 10 l/min (3 bar)
Armaturengeräuschgruppe II

Sortiments-, Modell- und technische Änderungen vorbehalten. Massangaben in mm.

www.kwc.com 04.01.2021