

VersaHit Dual USB A/C

Product number: 7053251

Configuration: brushed stainless steel




Configuration options

- 7053251 | brushed stainless steel
- 7053252 | black matt
- 7053255 | gunmetal
- 7053256 | white matt
- 7053282 | with Belgian/French socket, brushed stainless steel
- 7053283 | with Belgian/French socket, gunmetal
- 7053284 | with Belgian/French socket, white matt
- 7053285 | with Belgian/French socket, black matt

- ✓ Built-in socket element
- ✓ 1 x earthed plug socket
- ✓ square

Socket element. 1-fold. With double USB charger (charging station). Built-in socket with double USB charger.

- 3400 watts/16 A, 220–250 VAC, IP54
- 117 x 117 x 40/50 mm (W x L x D)
- cut-out dimensions approx. 108 x 108 mm, R 4 mm
- 2000 mm mains connection line, earthing contact plug supplied loosely
- double USB charger type A+C, 5 V, 2,4 A
- very low installation depth (ca. 40 mm)
- increased contact protection

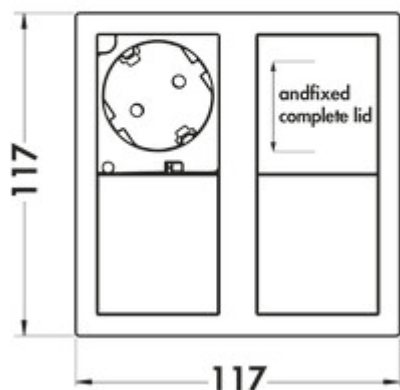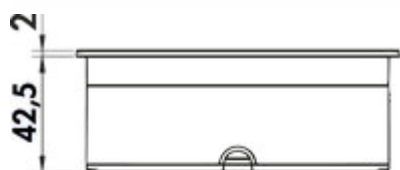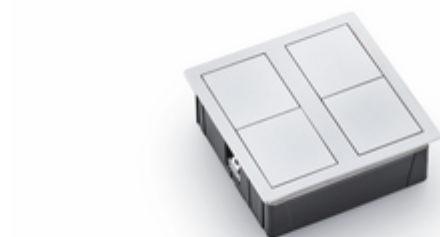

[more infos...](#)

Technical data

Article type	Socket element	Version sockets	1 x earthed plug socket
Width	117 mm	Mains plug loosely enclosed	Yes
Mains voltage	250 VAC	Colour bezel	Stainless steel brushed
Protection class	IP54	Colour socket	black
Cable outlet	cable outlet back	Cover/blind type	Sliding lid
Max. connected load	3400 watt	Number of USB ports	2
Mounting/Fixing	in the worktop installation front panel side wall	USB type	USB-A USB-C
Certification	CE	Type of socket element	Built-in socket element
Cut-out dimension	approx. 108 x 108 mm, R 4 mm	Rated current	16 A
Shape	square	Number of sockets (total)	1
Length of the supply line (primary)	2.000 mm	Touch protection ("child safety lock")	with increased contact protection
Installation depth	40 mm	USB version	1 x USB charger type A, 5 VDC, IA/I output: 2400 mA 1 x USB charger type C, 5 VDC, IA/I output: 2400 mA