

KWC Domo E4

Product number: 5022134

Configuration: stainless steel

Configuration options


5022134 | stainless steel

- ✓ Sink faucet
- ✓ high pressure
- ✓ Swivelling

Single lever faucet with swivelling/pull-out hose with shower head (can be switched to stream or shower) and ceramic cartridge.

— swivel range 150°


— drill Ø 35 mm

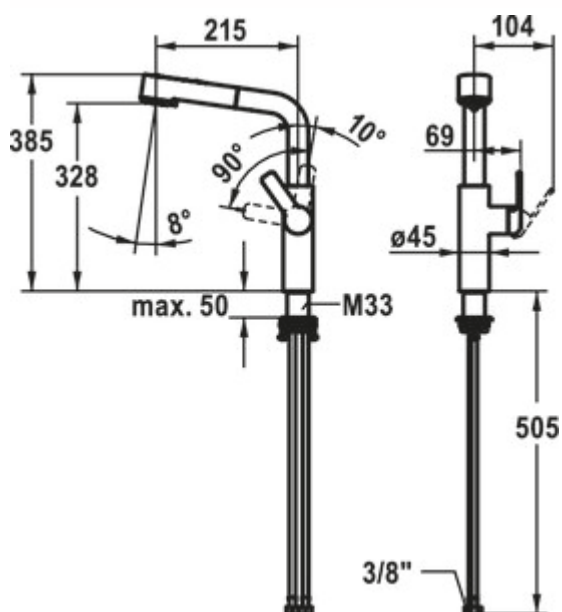


[more infos...](#)

Technical data

Article type	Sink faucet	Material	stainless steel
Brand	KWC	Backflow preventer	Yes
Number of handles	1	Hose thread	3/8"
Total installation height	385 mm	Worktop thickness	50 mm
Outreach	215 mm	Swivel range handle	90 °
Outlet	Swivelling Extractable	TouchProtect	Yes
Discharge height	328 mm	Including quick assembly system	Yes
Operating mode	Lever	Number of tap holes	1
Drilling diameter	35 mm	ECO function	Water saving function
Handle position	right	Temperature limiter/scald protection	Yes
Manufacturer's warranty	5 years manufacturer's warranty 10-year after-sales guarantee on spare parts	Spring-guided hose shower	No
Cartridge with ceramic sealing discs	Yes	Minimum distance wall to centre tap hole	26 mm
Swivel range outlet	150°	Anti-limestone jet regulator	Yes
Factory customer service	Yes	Angle of inclination of aerator	8 °
Type of fitting	Single lever faucet	Temperature adjustable	Yes
Operating pressure	high pressure	Type of hose shower	Integrated hose spray
Width	45 mm		

**KWC**

- Positionierung des Hebels nur rechts möglich
 - Sicherheit für Kinder: Kaltwasser bei Hebelposition vorne
- Abstand Wand zu Mitte Tischbohrung min. 26 mm
- TouchProtect - Schutz vor Verbrennungen durch Zweischalenprinzip
- Eigensicher gegen Rückfließen
- Auszugbrause
 - SprayClean - aktive Kalkbeseitigung und schnelle Siebreinigung
 - bis 600 mm ausziehbar
 - TripleClean - Umstellbar zwischen Normal-, Soft- und Powerstrahlmodus
 - Schlauchoberfläche passend zu Armaturoberfläche
 - QuickConnect - Einfaches Schlauchstecksystem
- Schlauchdurchführung, schwenkbar 150°
- EasyLock - einfache Auszugsbrauserückführung
- OptimalSpace - grosszügiger Wasch- / Arbeitsbereich
- KWC Steuerpatrone M 35 S
 - mit Keramikscheibentechnik
 - Auslaufmenge und Temperatur stufenlos einstellbar
 - Temperaturbegrenzung
- Flexible Anschlussschläuche ¾"
- QuickInstallation - Befestigung mit Gewindestutzen M33 x 1,5 mit Feststellschrauben
- Tischbohrung ø35 mm



www.kwc.com 15.01.2021