

KWC Sin 3

Product number: 5022191

Configuration: chrome, high pressure

Configuration options


5022191 | chrome, high pressure

- ✓ Sink faucet
- ✓ high pressure
- ✓ Swivelling

Single lever faucet. With swivelling/pull-out hose with shower head (can be switched to stream or shower) lateral lever and ceramic cartridge.

— swivel range 360°

— drill Ø 35 mm

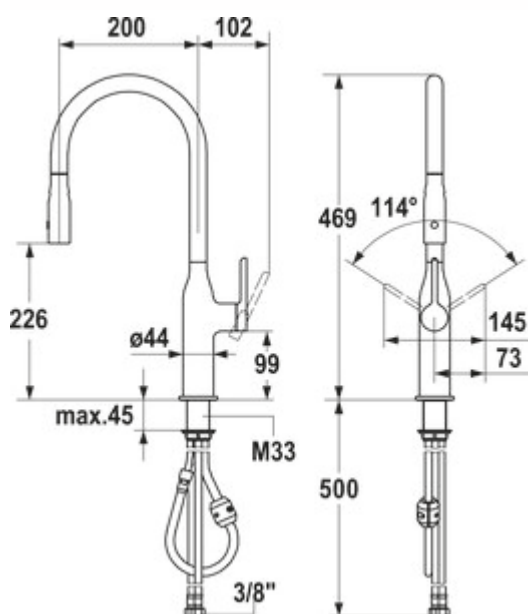

BELGAQUA




[more infos...](#)

Technical data

Article type	Sink faucet	Width	44 mm
Brand	KWC	Material	brass
Number of handles	1	Hose thread	3/8"
Total installation height	469 mm	Worktop thickness	45 mm
Outreach	200 mm	Swivel range handle	114 °
Outlet	Swivelling Extractable	TouchProtect	Yes
Discharge height	226 mm	Number of tap holes	1
Operating mode	Lever	Temperature limiter/scald protection	Yes
Drilling diameter	35 mm	Convertible jet/shower	Yes
Manufacturer's warranty	5 years manufacturer's warranty 10-year after-sales guarantee on spare parts	Spring-guided hose shower	No
Cartridge with ceramic sealing discs	Yes	Length shower hose	500 mm
Swivel range outlet	360°	Anti-limestone jet regulator	Yes
Factory customer service	Yes	Temperature adjustable	Yes
Type of fitting	Single lever faucet	Type of hose shower	Integrated hose spray
Operating pressure	high pressure		

Dimensional sketch (PDF)

KWC SIN



KWC-Nr.	Oberfläche
10.261.002.000FL	ganzchrom
A 200, flexible Anschlussschläuche	

Küche

Hebelmischer

- Positionierung des Hebels rechts oder links möglich
- TouchProtect - Schutz vor Verbrennungen durch Zweischalenprinzip
- Ausziehbare Umstellbrause 360° drehbar
 - SprayClean - aktive Kalkbeseitigung und schnelle Siebreinigung
 - Neoperl® Caché®
 - PowerClean - Siebstrahlmodus, mit Rückstellautomatik
 - bis 500 mm ausziehbar
 - Schlauchoberfläche passend zu Armaturoberfläche
- Schlauchdurchführung, schwenkbar 360°
- EasyLock - einfache Auszugbrausenrückführung
- OptimalSpace - grosszügiger Wasch- / Arbeitsbereich
- KWC Steuerpatrone 5 25
 - mit Keramikscheibentechnik
 - Auslaufmenge und Temperatur stufenlos einstellbar
- Flexible Anschlussschläuche 3/8"
- Befestigung mit Gewindestutzen M33 x 1.5
- Tischbohrung ø35 mm

Auslaufmenge Normalstrahl 7 l/min (3 bar)

Auslaufmenge Siebstrahl 6 l/min (3 bar)

Armaturengeräuschgruppe I

Sortiments, Modell- und technische Änderungen vorbehalten. Massangaben in mm.

www.kwc.com 11.01.2021