



Twist USB A

Product number: 7053170

Configuration: with earthed plug socket, stainless steel col.



Configuration options

- 7053170 | with earthed plug socket, stainless steel col.
- 7053171 | with earthed plug socket, black matt
- 7053172 | with earthed plug socket, white matt
- 7053173 | with Belgian/French socket, stainless steel coloured
- 7053174 | with Belgian/French socket, black matt
- 7053175 | with Belgian/French socket, white matt

- ✓ Socket element
- ✓ 1 x earthed plug socket
- ✓ round

Socket element. 1-fold and double USB charger (charging station).

- 3680 watt/16 A, 250 VAC, IP20
- 2 x USB charger type A, 5 VDC, I/A out: 2 x 1550 mA
- H05VV-F 3G1
- 3-pole with earthing contact
- 2000 mm mains connection line, with earthed plug enclosed loose
- drill Ø 105 mm, for plate thickness from 8 mm
- increased contact protection
- cable outlet rear side

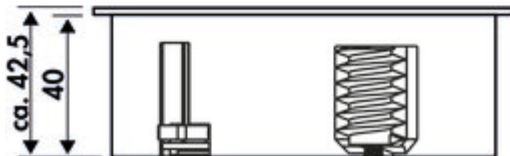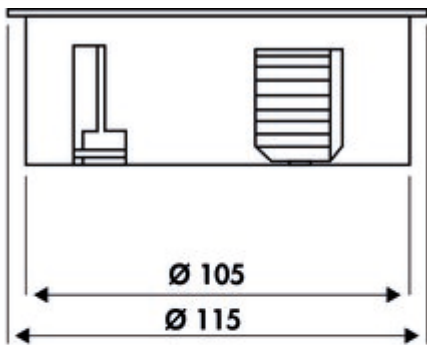

[more infos...](#)

Technical data

Article type	Socket element	Colour socket	black
Drilling diameter	105 mm	Installation diameter	115 mm
Mains voltage	250 VAC	Cover/blind type	Turning lid
Protection class	IP20	Integrated water drain	Yes
Cable outlet	cable outlet rear side	Number of USB ports	1
Max. connected load	3680 watt	USB type	USB-A
Mounting/Fixing	installation in the worktop	Type of socket element	Socket element
Further	3-pole with earthing contact	Rated current	16 A
Certification	CE	Wiring	3-wire with free ends bared
Shape	round	Number of sockets (total)	1
Length of the supply line (primary)	2.000 mm	Opening mechanism	Push-to-open
Installation depth	40 mm	Touch protection ("child safety lock")	with increased contact protection
Version sockets	1 x earthed plug socket	Worktop thickness	8 mm
Mains plug loosely enclosed	Yes	USB version	2 x USB charger type A, 5 VDC, IA/ I out: 2 x 1550 mA
Colour bezel	stainless-steel coloured		

Accessories

7053024	Hole saw, Ø 105 mm, for Twist and Duplex
---------	--