



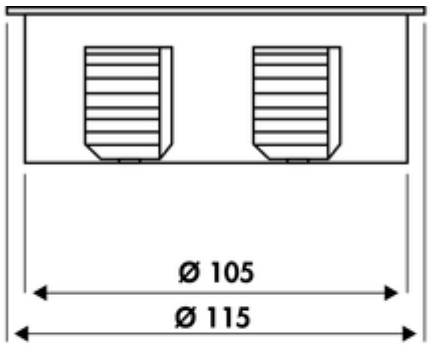

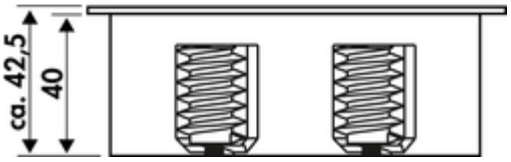

Twist double plug socket

Product number: 7053025
Configuration: with Belgian/French sockets, stainless steel coloured

Configuration options

7053021 | with earthed plug sockets, stainless steel coloured
7053025 | with Belgian/French sockets, stainless steel coloured
7053059 | with Swiss sockets, stainless steel coloured
7053075 | with earthed plug sockets, black matt
7053076 | with earthed plug sockets, white matt
7053085 | with Belgian/French sockets, black matt
7053086 | with Belgian/French sockets, white matt
7053189 | with Swiss sockets, black matt

✓ Built-in socket element
✓ 2 x with Belgian/French socket
✓ round

Socket element. 2-fold.
— 3680 watt/16 A, 250 VAC, IP20
— H05VV-F 3G1
— 3-pin with earthing contact
— 2000 mm mains connection line with earthing contact plug enclosed loosely
— drill Ø 105 mm, for board thicknesses from 8 mm
— increased contact protection
— cable outlet below side

CE

more infos...

Naber GmbH
Enschedestr. 24
DE-48529 Nordhorn

Tel. +49 5921 704-0
Fax +49 5921 704-140
naber@naber.com

Technical data

Article type	Socket element
Height	42,5 mm
Drilling diameter	105 mm
Mains voltage	250 VAC
Protection class	IP20
Cable outlet	cable outlet rear side
Max. connected load	3680 watt
Mounting/Fixing	installation on the worktop
Further	3-pole with earthing contact
Certification	CE
Shape	round
Length of the supply line (primary)	2.000 mm
Installation depth	40 mm

Version sockets	2 x with Belgian/French socket
Mains plug loosely enclosed	Yes
Colour bezel	stainless-steel coloured
Colour socket	black
Installation diameter	115 mm
Cover/blind type	Turning lid
Integrated water drain	Yes
Type of socket element	Built-in socket element
Wiring	3-wire with free ends bared
Number of sockets (total)	2
Opening mechanism	Push-to-open
Touch protection ("child safety lock")	with increased contact protection
Worktop thickness	8 mm

Naber GmbH
Enschedestr. 24
DE-48529 Nordhorn

Tel. +49 5921 704-0
Fax +49 5921 704-140
naber@naber.com